

YEL350 SERIES 350W



YEL350 series are designed with lower profile housing ,Adopting the input of 90-132VAC or 180-264VAC (select by switch) .

In addition to the high efficiency,Delivering an extremely low no load power consumption. the design of metallic mesh case enhances the heat dissipation.

The good performance can be used for industrial automation & control systems, varied equipments etc.

Features



AC input range selectable by switch



Forced air cooling by built-in DC fan



High operating temperature up to 70 °C



Higher Efficiency



Protection:Short Circuit/Overload/
Over Voltage/Over Temperature



Three Years Warranty

Model Information

Yingjiao Part Number	DC Voltage	Rated Current	Rated Power	VOLTAGE ADJ.RANGE	Max.Capacitive Load
YEL350-12	12V	29A	348W	10.2~13.8V	20000uF
YEL350-15	15V	23.2A	348W	13.5~18V	10000uF
YEL350-24	24V	14.6A	350.4W	21.6~28.8V	8000uF
YEL350-36	36V	9.7A	349.2W	32.4~39.6V	6000uF
YEL350-48	48V	7.3A	350.4W	43.2~52.8V	4000uF
YEL350-60	60V	5.83A	350W	54.0~66.0V	1000uF

Input

VOLTAGE RANGE	90~132VAC/180~264VAC by switch 240~370VDC (switch on 230VAC)	
FREQUENCY RANGE	47/63Hz	
AVERAGE EFFICIENCY	85%	YEL350-12
	86%	YEL350-15
	88.0%	YEL350-24
	88.5%	YEL350-36
	89%	YEL350-48
	88.5%	YEL350-60
AC CURRENT(Typ.)	6.8A/115VAC 3.4A/230VAC	
INRUSH CURRENT(Typ.)	60A/115VAC 60A/230VAC	
LEAKAGE CURRENT	<2mA/240VAC	

Output

RIPPLE & NOISE(max.)	150mVp-p	YEL350-12
	150mVp-p	YEL350-15
	150mVp-p	YEL350-24
	200mVp-p	YEL350-36
	200mVp-p	YEL350-48
	240mVp-p	YEL350-60
VOLTAGE TOLERANCE	±1.5%	YEL350-12
	±1.0%	YEL350-15
	±1.0%	YEL350-24
	±1.0%	YEL350-36
	±1.0%	YEL350-48
	±1.0%	YEL350-60
LINE REGULATION	±0.5%	
LOAD REGULATION	±1.0%	YEL350-12
	±0.5%	YEL350-15
	±0.5%	YEL350-24
	±0.5%	YEL350-36
	±0.5%	YEL350-48
	±0.5%	YEL350-60
MINIMUM LOAD	0%	
SETUP TIME	1600ms/230VAC at full load	
	1600ms/115VAC at full load	
RISE TIME	50ms/230VAC at full load	
	50ms/115VAC at full load	
HOLD UP TIME (Typ.)	16ms/230VAC at full load	
	12ms/115VAC at full load	

Protection

SHORT CIRCUIT	Protection type: Hiccup mode, recovers automatically after fault condition is removed
OVER LOAD	110%-140% Rated Output Power Protection type: Hiccup mode, recovers automatically after fault condition is removed
OVER VOLTAGE	12V:13.8~16.2V 15V:18~21V 24V:27.6~33.6V 36V:41.4~46.8V 48V:55.2~64.8V 60V:69~78V recovers automatically after fault condition is removed.
OVER TEMPERATURE	Protection type: Hiccup mode, recovers automatically after fault condition is removed.


Environment

WORKING TEMP.	-30 °C to +70 °C (Refer to "Derating Curve")
Working Humidity	20 ~ 90% RH Non-Condensing
STORAGE TEMP, HUMIDITY	-40°C ~ +85°C, 10 ~ 95% RH non-condensing
TEMP. COEFFICIENT	± 0.03%/°C(0~50°C)
VIBRATION	10~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y,Z axes
OVER VOLTAGE CATEGORY	III; According to BS EN/EN61558, BS EN/EN50178, altitude up to 2000 meters
MTBF	300K hrs min. MIL-HDBK-217F (25°C)

SAFETY & EMC

SAFETY STANDARDS	BS EN/EN62368-1, UL62368-1 (YEL350-5 Pending)
WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC/min,I/P-FG:2KVAC/min,O/P-FG:0.5KVAC/min
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/ 500VDC/25 °C/70% RH
EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class A,
EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,perf.CriteriaA BS EN/EN61000-4-11,perf.Criteria B

Note

- 1.All parameters NOT specially mentioned are measured at 115/230VAC input, rated load and 25°C of ambient temperature
 - 2.Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
 - 3.Tolerance : includes set up tolerance, line regulation and load regulation.
 - 4.Line regulation is measured from low line to highline at rated load.
 5. Load regulation is measured from 0% to 100% rated load.
 - 6.Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.
 - 7.The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m(6500ft).
 - 8.The power supply is considered a component which will be installed into a final equipment.
- All the EMC tests are been executed bymounting the unit on a 360mm*360mm metal plate with 1mm of thickness.
The final equipment must be re-confirmed that it still meets EMC directives.
- 9.The out case needs to be connected to the earth , of system when the terminal equipment in operating.


Dimensions & Weight

Length:	215mm/8.64in
Width:	115mm/4.53in
Height:	30mm/1.18in
Weight:	740g

Packing

Carton Size:	38 × 20 x 25.5 CM 14.96 x 7.87 x 10.04 in
Master Carton Quantities:	15pcs/Carton

Dimensions and Installation

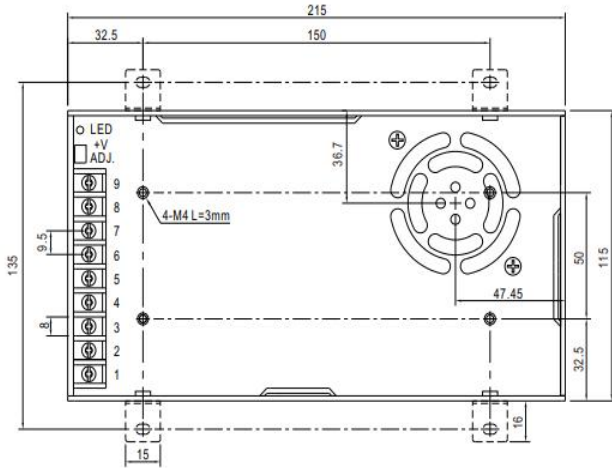

Input



No.	Description
1	AC/L
2	AC/N
3	FG \perp

Output :

No.	Description
4-6	DC OUTPUT -V
7-9	DC OUTPUT +V

Switch	AC Input	DC Input
	90-132VAC	---
	180-264VAC	240-373VDC

Screw Spec.	L(max)	Torque(max)
M4	5mm	0.9N · m
M4	3mm	0.9N · m

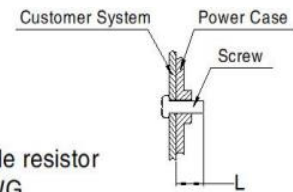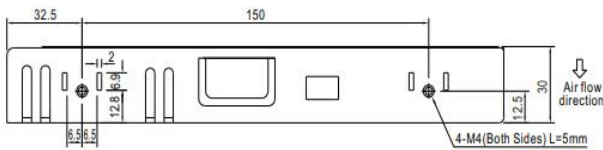

Note:

Unit: mm[inch]


ADJ: Output adjustable resistor

Wire range: 22-12AWG


Connector tightening torque: M3.5, 0.8N · m

General tolerances: $\pm 1.00[\pm 0.039]$

Block Diagram

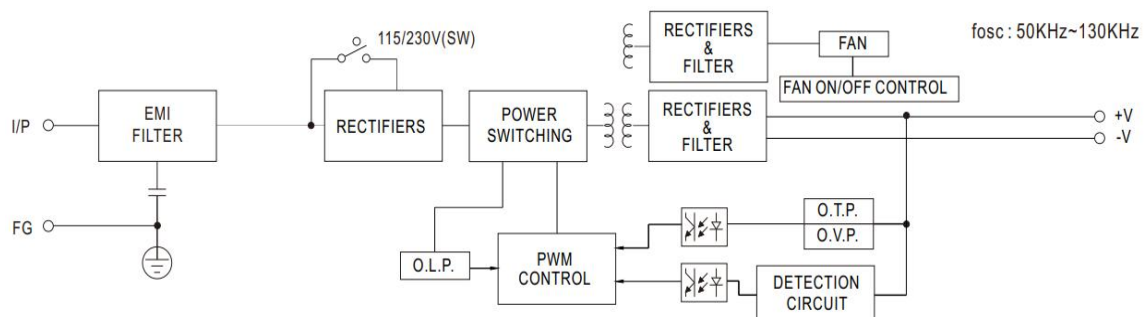

Deduction curve and temperature

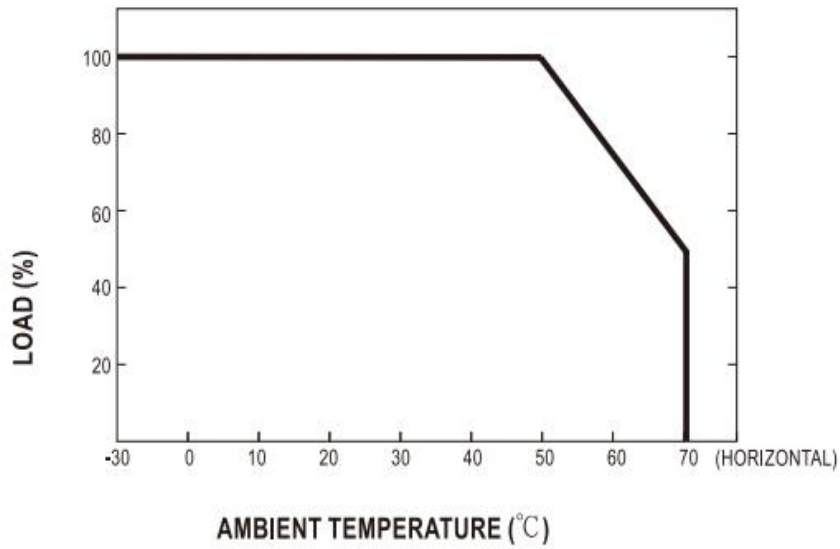

Minus output and input voltage curves

