

YSC12 SERIES

12W



Features

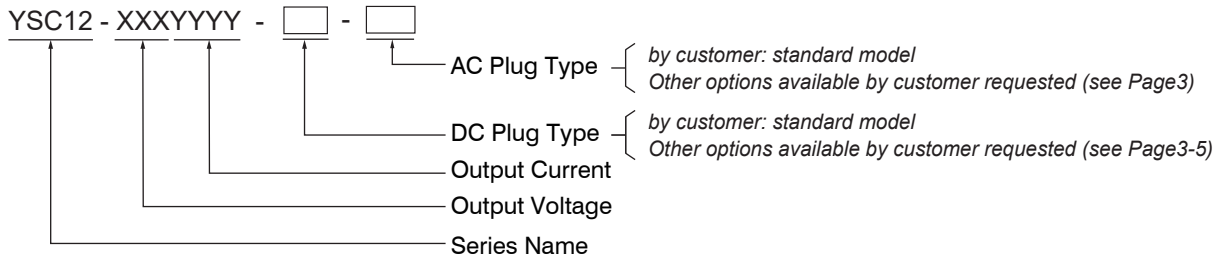
- IP67
- Energy efficiency level VI
- Class II Power Supply
- 3 Years Warranty
- Universal AC input/Full range
- No load power consumption < 0.21W
- Protections: Short Circuit /Over Load / Over Voltage
- -20~+70℃ wide range working temperature

Applications

- Office Facilities
- Industrial Equipments
- Consumer Electronic Devices
- Telecommunication Devices

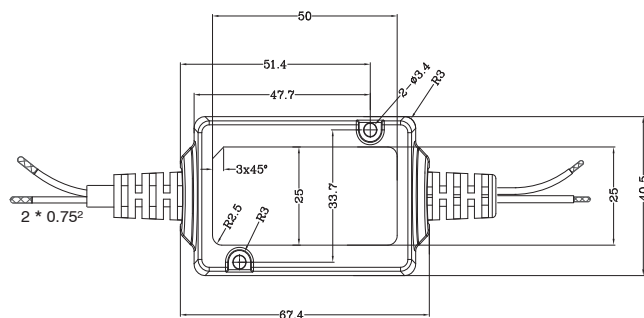
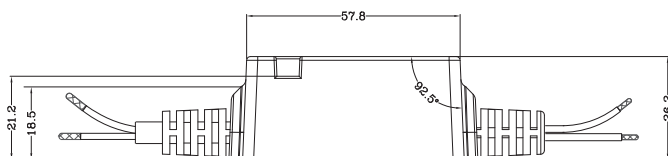


Model Description

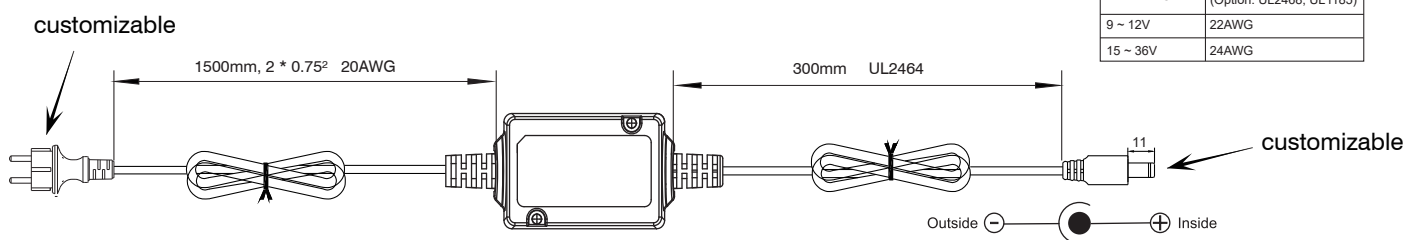


Dimensions and installation

Standard Model



Custom-made model



File last modification time: 2025-2-25

Specification

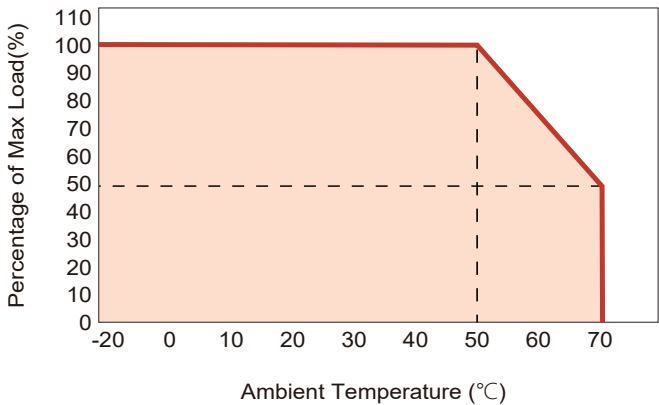
Model	Order P/N	YSC12-0502400 - □ - □	YSC12-0901330 - □ - □	YSC12-1201000 - □ - □	YSC12-1500800 - □ - □	YSC12-2400500 - □ - □
	Safety Model No.	YSC12-0502400	YSC12-0901330	YSC12-1201000	YSC12-1500800	YSC12-2400500
Output	DC Voltage	5V	9V	12V	15V	24V
	Rated Current	2.4A	1.33A	1A	0.8A	0.5A
	Rated Power	12W	12W	12W	12W	12W
	Ripple & Noise(max.)	300mVp-p	100mVp-p	150mVp-p	150mVp-p	200mVp-p
	Voltage Tolerance	±5%	±5%	±5%	±5%	±5%
	Line Regulation	±3%	±3%	±3%	±3%	±3%
	Load Regulation	±5%	±5%	±5%	±5%	±5%
	Setup,Rise,Hold up Time	1.0s,40ms,80ms/230VAC(at full load)1.0s,40ms,12ms/115VAC(at full load)				
Input	Rated Voltage Range	100-240VAC				
	Voltage Range	85-265VAC				
	Frequency Range	50/60Hz				
	AC Current	0.4A/115VAC0.2A/230VAC				
	Inrush Current	Cold Start 60A/200us at 230VAC 50HzCold Start 40A/200us at 115VAC 50Hz				
	Leakage Current	<0.25mA/230VAC				
	Efficiency	83%	83.5%	83%	84%	84.5%
	No Load Power Consumption	<0.1W				
Protection	Over Load	105~150% Hiccup mode, recovers automatically after fault condition is removed.				
	Short Circuit	Shut down o/p voltage, re-power on to recover.				
	Over Voltage	120~180% Shut down o/p voltage, re-power on to recover.				
Ambient	Working TEMP.	-20 ~ +70 ℃ (Please refer to “Derating Curve”section)				
	Working Humidity	20 ~ 95%RH Non-condensing				
	Storage TEMP. Humidity	-40 ~ +85 ℃, 10 ~ 95%RH Non-condensing				
	TEMP. Coefficient	±0.03%/(0 ~ 40 ℃)				
	Vibration	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes				
Safety	Safety Standards	EN 60335-1, EN 62368-1, UL 62368, BS EN 60335-1				
	Withstand Voltage	I/P-O/P: 3KVAC/1min				
	Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25 ℃ / 70% RH				
EMC	EMC Emission	Parameter	Standard		Test Level	
		Conducted	EN55032(CISPR32)		CLASS B	
		Radiated	EN55032(CISPR32)		CLASS B	
		Harmonic Current	EN61000-3-2		CLASS B	
		Voltage flicker	EN61000-3-3		CLASS B	
	EMC Immunity	Parameter	Standard		Test Level	
		ESD	EN61000-4-2		Level 3, 8KV air, criteria A	
		Radiated Susceptibility	EN61000-4-3		Level 3, criteria A	
		EFT/Burest	EN61000-4-4		Level 3, criteria A	
		Surge	EN61000-4-5		Level 4, 2KV/L-N, criteria A	
		Conducted	EN61000-4-6		Level 3, criteria A	
		Magnetic Field	EN61000-4-8		Level 4, criteria A	
		Voltage Dips and interruptions	EN61000-4-11		> 95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
Others	Packing	100g/pcs; 40.5 x 26 x 30 cm; 100pcs/carton				
	Dimension (LxWxH)	67.4 x 40.5 x 26.2 mm				
	Plug and Cable	See page 3~5; Other type available by customer requested				
	MTBF	584.6Khrs min. MIL-HDBK-217F(25 ℃)				
Note	1. Tolerance: includes set up tolerance, line regulation and load regulation. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 0% to 100% rated load. 5. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 ℃ of ambient temperature. 6. De-rating may be needed under low input voltages. Please refer to “Static Characteristic” sections for details. 7. The power supply is considered as a component that will be operated in combination with final equipment.Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.					

File last modification time: 2025-2-25

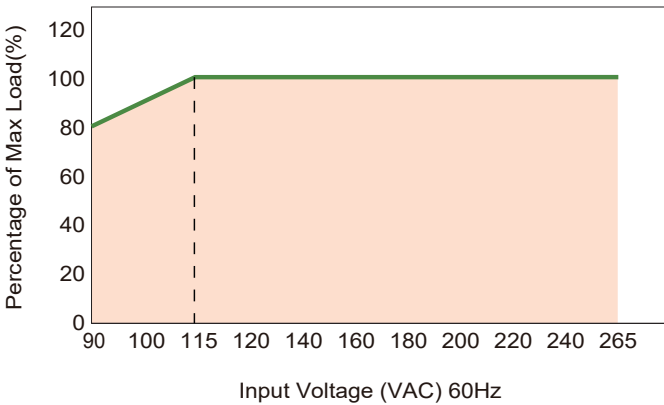
YSC12 SERIES
12W

Feature Curves

1. Derating Curve



2. Static Characteristics



Input Plug Type

Standard Model : by customer

by customer	Pin Assignment
Length of Land L1 by request	YJ's standard length, L: 30 mm, L1: 5 mm NOTE: The wire color is for reference only, please refer to the actual product

Custom-made Model : EU/US/AU/UK

EU	US	AU	UK

DC Output Plug (Option)


Standard Model : by customer

by customer	Pin Assignment
Length of Land L1 by request	YJ's standard length, L: 30 mm, L1: 5 mm NOTE: The wire color is for reference only, please refer to the actual product


YSC12 SERIES

12W


DC Output Plug (Option)


Tuning Fork Style			
			Straight
Type No.	A	B	C
	OD	ID	L
D1I	5.5	2.1	9.5
D1J	5.5	2.1	11.0
D1L	5.5	2.5	9.5
D1M	5.5	2.5	11.0

Tuning Fork Style			
			Right-angled
Type No.	A	B	C
	OD	ID	L
D1IR	5.5	2.1	9.5
D1JR	5.5	2.1	11.0
D1LR	5.5	2.5	9.5
D1MR	5.5	2.5	11.0

Barrel Style			
			Straight
Type No.	A	B	C
	OD	ID	L
D2I	5.5	2.1	9.5
D2J	5.5	2.1	11.0
D2L	5.5	2.5	9.5
D2M	5.5	2.5	11.0

Barrel Style			
			Right-angled
Type No.	A	B	C
	OD	ID	L
D2IR	5.5	2.1	9.5
D2JR	5.5	2.1	11.0
D2LR	5.5	2.5	9.5
D2MR	5.5	2.5	11.0

Lock Style			
			Floating Locking SWITCHCRAFT original or equivalent
Type No.	A	B	C
	OD	ID	L
D2S(S761K)	5.53	2.03	12.06
D2K(761K)	5.53	2.54	12.06
D2C(S760K)	5.53	2.03	9.52
D2D(760K)	5.53	2.54	9.52


Center Pin Style				EIAJ equivalent
Type No.	A	B	C	D
	OD	ID	L	Center Pin
D4A	5.5	3.4	11.0	1.0
D4B	6.5	4.4	11.0	1.4
D4C	7.4	5.1	11.0	0.6


YSC12 SERIES
12W


DC Output Plug (Option)


Tuning Fork Style				EIAJ equivalent
Type No.	A	B	C	
	OD	ID	L	
D3A	2.35	0.7	11.0	
D3B	4.0	1.7	11.0	
D3C	4.75	1.7	11.0	

MIN.Din 3Pin with Lock(male)				KYCON KPPX-3P equivalent
Type No.	Pin Assignment			
	PIN No.	Output		
M6B	1	+Vo		
	2	-Vo		
	3	+Vo		

MIN.Din 4Pin with Lock(male)				KYCON KPPX-4P equivalent
Type No.	Pin Assignment			
	PIN No.	Output		
M7B	1	+Vo		
	2	-Vo		
	3	-Vo		
	4	+Vo		

MIN.Din 4Pin with Lock(female)				KYCON KPJX-CM-4S equivalent
Type No.	Pin Assignment			
	PIN No.	Output		
M7BF	1	+Vo		
	2	-Vo		
	3	-Vo		
	4	+Vo		

Barrel Style				
Type No.	Pin Assignment			
	PIN No.	Output		
M1B	1	-Vo		
	2	-Vo		
	3	+Vo		
	4	-Vo		
	5	+Vo		

Type-C				
Type No.	A	B	C	
	OD	ID	L	
C1	2.4	1.3	8.25	