

# YEL75 SERIES 75W



YEL75 series are designed with lower profile housing and for wide range AC input from 90VAC to 264VAC.

In addition to the high efficiency, Delivering an extremely low no load power consumption. the design of metallic mesh case enhances the heat dissipation.

The good performance can be used for industrial automation & control systems, varied equipments etc.

## Features



Universal AC Input/ Full Range



Cooling by free air convection



High operating temperature up to 70 °C



Higher Efficiency/Low Power Dissipation



Protection: Short Circuit/Overload/  
Over Voltage



Three Years Warranty

## Model Information

Yingjiao Part Number	DC Voltage	Rated Current	Rated Power	VOLTAGE ADJ.RANGE	Max.Capacitive Load
YEL75-5	5V	14A	70W	4.5~5.5V	10000uF
YEL75-12	12V	6A	72W	10.2~13.8V	6000uF
YEL75-15	15V	5A	75W	13.5~18V	5000uF
YEL75-24	24V	3.2A	76.8W	21.6~28.8V	1500uF
YEL75-36	36V	2.1A	75.6W	32.4~39.6V	1000uF
YEL75-48	48V	1.6A	76.8W	43.2~52.8V	680uF

## Input

RATED INPUT VOLTAGE	100-240VAC
OPERATING VOLTAGE RANGE	90-264VAC/120-373VDC
FREQUENCY RANGE	50-60Hz
AVERAGE EFFICIENCY(115/230VAC)	87.0% YEL75-5
	88.0% YEL75-12
	88.0% YEL75-15
	88.5% YEL75-24
	89.0% YEL75-36
	90.0% YEL75-48
AC CURRENT(Typ.)	1.7A/115VAC
	0.85A/230VAC
INRUSH CURRENT(Typ.)	COLD START 40A/115VAC,80A/230VAC
LEAKAGE CURRENT	<0.75mA/240VAC

## Output

RIPPLE & NOSE(max.)	100mVp-p	YEL75-5
	120mVp-p	YEL75-12
	120mVp-p	YEL75-15
	150mVp-p	YEL75-24
	200mVp-p	YEL75-36
	200mVp-p	YEL75-48
VOLTAGE TOLERANCE	±2.0%	YEL75-5
	±1.0%	YEL75-12
	±1.0%	YEL75-15
	±1.0%	YEL75-24
	±1.0%	YEL75-36
	±1.0%	YEL75-48
LINE REGULATION	±0.5%	
LOAD REGULATION	±1.0%	YEL75-5
	±0.5%	YEL75-12
	±0.5%	YEL75-15
	±0.5%	YEL75-24
	±0.5%	YEL75-36
	±0.5%	YEL75-48
MINIMUM LOAD	0%	
STAND-BY POWER CONSUMPTION	0.3W	
SETUP TIME	500ms/230VAC at full load	
	800ms/115VAC at full load	
RISE TIME	30ms/230VAC at full load	
	20ms/115VAC at full load	
HOLD UP TIME (Typ.)	60ms/230VAC at full load	
	20ms/115VAC at full load	

## Protection

SHORT CIRCUIT	Protection type: Hiccup mode, recovers automatically after fault condition is removed
OVER LOAD	110%-150% Rated Output Power
	Protection type: Hiccup mode, recovers automatically after fault condition is removed
OVER VOLTAGE	5V:5.75~6.75V
	12V:13.8~16.2V
	15V:18.75~21.75V
	24V:28.8~33.6V
	36V:41.4~48.6V
	48V:55.2~64.8V
	Protection type : Shut down o/p voltage, re-power on to recover


## Environment

WORKING TEMP.	-30 °C to +70 °C (Refer to "Derating Curve")
Working Humidity	20 ~ 90% RH Non-Condensing
STORAGE TEMP, HUMIDITY	-40°C ~ +85°C, 10 ~ 95% RH non-condensing
TEMP. COEFFICIENT	± 0.03%/°C(0~50°C)
SAFETY PROTECTION	CLASS I
VIBRATION	10~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y,Z axes
OVER VOLTAGE CATEGORY	III; According to BS EN/EN61558, BS EN/EN50178, altitude up to 2000 meters
MTBF	600K hrs min. MIL-HDBK-217F (25°C)

## SAFETY & EMC

SAFETY STANDARDS	BS EN/EN62368-1, BS EN/EN60335-1, BS EN/EN61558-1
WITHSTAND VOLTAGE	I/P-O/P:4KVAC/min, I/P-PE:2KVAC/min,O/P-FG:1.25KVAC/min
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/ 500VDC/25 °C/70% RH
EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2,-3,Class A
EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,perf.CriteriaA BS EN/EN61000-4-11,perf.CriteriaA,BS EN/EN55035

## Note

- 1.All parameters NOT specially mentioned are measured at 115/230vAC input, rated load and 25°C of ambient temperature.
  - 2.Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
  - 3.Tolerance : includes set up tolerance, line regulation and load regulation.
  - 4.Line regulation is measured from low line to highline at rated load.
  5. Load regulation is measured from 0% to 100% rated load.
  - 6.Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.
  - 7.The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m(6500ft).
  - 8.The power supply is considered a component which will be installed into a final equipment.
- All the EMC tests are been executed by mounting the unit on a 360mm\*360mm metal plate with 1mm of thickness.
- The final equipment must be re-confirmed that it still meets EMC directives.
- 9.The out case needs to be connected to the earth  of system when the terminal equipment in operating.


## Dimensions & Weight

Length:	99mm/3.89in
Width:	97mm/3.22in
Height:	30mm/1.18in
Weight:	250g

## Packing

Carton Size:	52 × 32.5 × 11.5 CM 20.47 x 12.80 x 4.53 in
Master Carton Quantities:	45pcs/Carton

## Dimensions and Installation

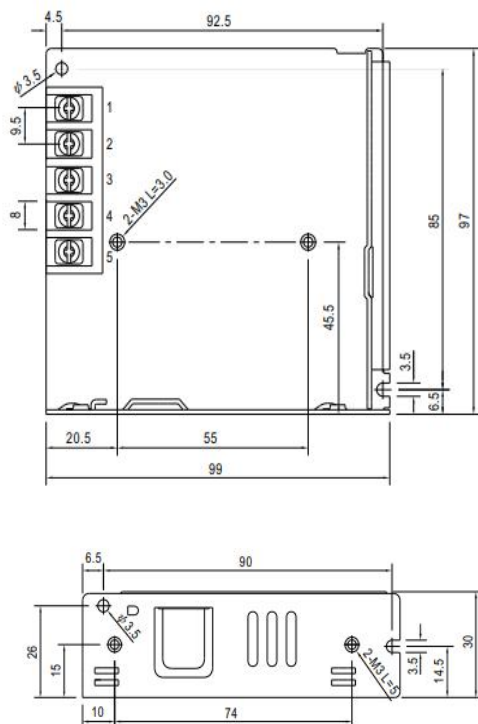


### Input

No.	Description
1	AC/L
2	AC/N
3	FG $\perp$

### Output


No.	Description
4	DC OUTPUT -V
5	DC OUTPUT +V

Screw Spec.	L(max)	Torque(max)
M3	5mm	0.4N·m
M3	3mm	0.4N·m

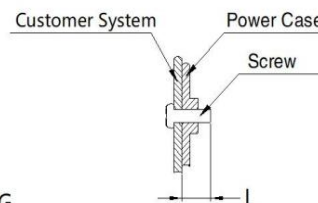


Note:  
 Unit: mm[inch]  
 Wire range: 22-12AWG  
 Connector tightening torque: M3.5 , 0.8N·m  
 General tolerances:  $\pm 1.00[\pm 0.039]$

## Block Diagram

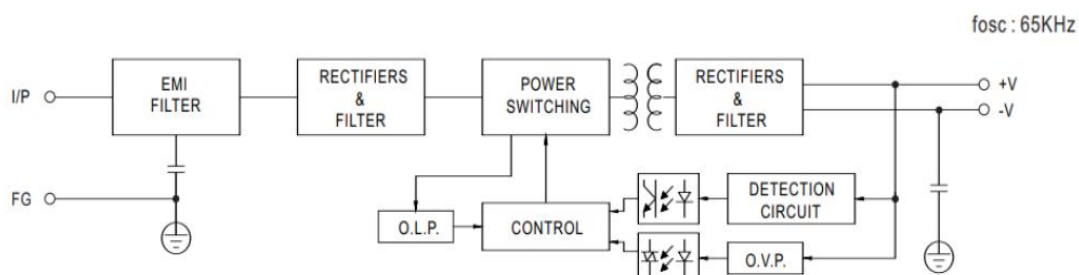

## Deduction curve and temperature

---

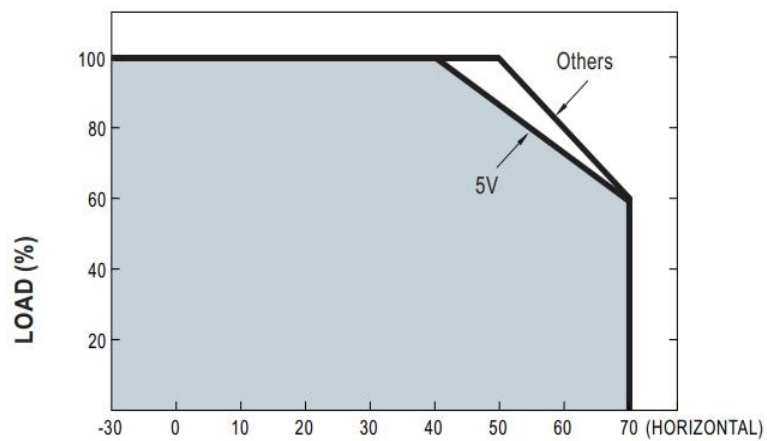

## Minus output and input voltage curves

---

