

## YSM10 SERIES 10W



YSM10 series is a 10W Smaller(46.08\*25.78\*21.7mm)

AC-DC module power supply adopting range: 90-264VAC

The series has extremely low no-load power consumption below 0.1W. High efficiency up to 83% to reduce power loss

The series cost-effective,, high reliability, operates from -30 ~ 85°C. A variety of appearance sizes are available for easy installation and use.

These converters offer excellent EMC performance and meet international standards , ready to be soldered onto the PCB boards of Industrial design, household appliances, communication equipment, testing instruments and other electronic instruments

### Features



Universal Input: 90~264VAC



Compact Size Design



Low no-load power consumption



Low Ripple & Noise, high efficiency



Protection: Short Circuit/Over Current/  
Over Voltage




Three Years Warranty

## Model Information

Yingjiao Part Number	DC Voltage	Rated Current	Rated Power	Max.Capaciti ve Load
YSM10-0332500	3.3V	2.5A	8.25W	6600uF
YSM10-0502000	5V	2A	10W	5000uF
YSM10-1200850	12V	0.85A	10.2W	2000uF
YSM10-1500670	15V	0.67A	10.05W	820uF
YSM10-2400420	24V	0.42A	10.08W	680uF

## Model Encoding

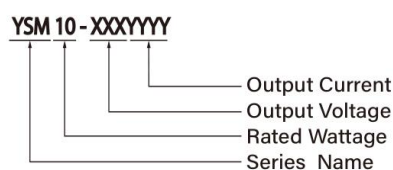

## Input

VOLTAGE RANGE	90~264VAC
FREQUENCY RANGE	47-63Hz
NO LOAD POWER CONSUMPTION	0.1W MAX
AVERAGE EFFICIENCY(Typ.)	74.0%      YSM10-0332500
	77.0%      YSM10-0502000
	82.0%      YSM10-1200850
	82.0%      YSM10-1500670
	83.0%      YSM10-2400420
AC CURRENT(Typ.)	0.3A/115VAC
	0.15A/230VAC
INRUSH CURRENT(Typ.)	Cold Start 20A/115VAC
	Cold Start 40A/230VAC
LEAKAGE CURRENT	<0.707mA/264VAC,50Hz

## Output

RIPPLE & NOISE(max.)	200mVp-p
VOLTAGE TOLERANCE	±2.5%
LINE REGULATION	±0.3%
LOAD REGULATION	±0.5%
SETUP,RISE TIME	1000ms, 30ms/230VAC at full load 1500ms, 30ms/115VAC at full load
HOLD UP TIME (Typ.)	30ms/230VAC at full load 8ms/115VAC at full load

## Protection

OVER CURRENT	110%-200% Rated Output current Protection type: Hiccup mode, recovers automatically after current goes down
SHORT CIRCUIT	Protection type: Hiccup mode, recovers automatically after fault condition is removed
OVER VOLTAGE	YSM10-0332500: 3.8 ~ 6V YSM10-0502000: 5.25 ~ 7.5V YSM10-1200850: 12.6 ~ 16.5V YSM10-1500670: 15.75 ~ 24V YSM10-2400420: 25.2 ~ 34V Protection Type: Hiccup mode, recovers automatically after fault condition is removed

## Environment

WORKING TEMP.	-30°C to +85°C (Full load can be operated at -30°C to 50°C, while load should be reduced at 50°C to 85°C. Refer to "Derating Curve".)
WORKING HUMIDITY	20 ~ 90% RH Non-Condensing
STORAGE TEMP, HUMIDITY	- 40°C ~ +85°C, 10 ~ 95% RH non-condensing
TEMP. COEFFICIENT	± 0.03%/°C (0~50°C)
VIBRATION	10~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SOLDERING TEMPERATURE	Wave soldering: 265°C, 5s(max.); Manual soldering: 390°C, 3s(max.)
OVER VOLTAGE CATEGORY	II; According to EN62368-1; altitude up to 2000 meters
SAFETY PROTECTION	CLASS II
ALTITUDE APPLICATION	2000m
MTBF	> 1400K hrs min. MIL-HDBK-217F (25°C)

## SAFETY

SAFETY STANDARDS	IEC/UL62368-1, EN62368-1 safety approval
WITHSTAND VOLTAGE	I/P-O/P: 3.00KVAC/1min
ISOLATION RESISTANCE	I/P-O/P: 100M Ohms/ 500VDC/25 °C/70% RH

## EMC

EMC EMISSION	Parameter	Standard	Test Level/Note
	Conducted	BS EN/EN55032(CISPR32)	CLASS B
	Radiated	BS EN/EN55032(CISPR32)	CLASS B
	Harmonic Current/Note5	BS EN/EN61000-3-2	CLASS A
	Voltage Flicker	BS EN/EN61000-3-3	.....
EMC IMMUNITY	BS EN/EN55035, BS EN/EN61000-6-2		
	Parameter	Standard	Test Level/Note
	ESD	BS EN/EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact, criteria A
	Radiated Susceptibility	BS EN/EN61000-4-3	Level 3, criteria A
	EFT/Burest	BS EN/EN61000-4-4	Level 3, criteria A
	Surge	BS EN/EN61000-4-5	Level 3, 1KV/L-N, criteria A
	Conducted	BS EN/EN61000-4-6	Level 3, criteria A
	Magnetic Field	BS EN/EN61000-4-8	Level 4, criteria A
	Voltage Dips and interruptions	BS EN/EN61000-4-11	> 95% dip 0.5 periods, 30% dip 25 periods, > 95% interruptions 250 periods

## Note

---

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
  2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF & 47μF parallel capacitor.
  3. Tolerance : includes set up tolerance, line regulation and load regulation.
  4. The ambient temperature derating of 3.5°C /1000m with fanless models and of 5 °C/1000m with fan models for operating altitude higher than 2000m(6500ft).
  5. The power supply is considered as an independent unit ,but the final equipment still need to re-confirm that the whole system complies with the EMC directives.
- 

## PHYSICAL PROPERTY

---

LENGTH*WIDTH*HEIGHT:	46.08mm*25.78mm*21.7mm/1.81in*1.01in*0.85in;
WEIGHT:	40g
COOLING METHOD:	Natural Air Cooling
TEXTURE:	Black flame retardant and heat resistant plastic

---


## Packing

---


Carton Size:	41 × 37 x 19.5 cm/16.14 x 14.57 x 7.68 in;
Master Carton Quantities:	250pcs/Carton

---

## Curve

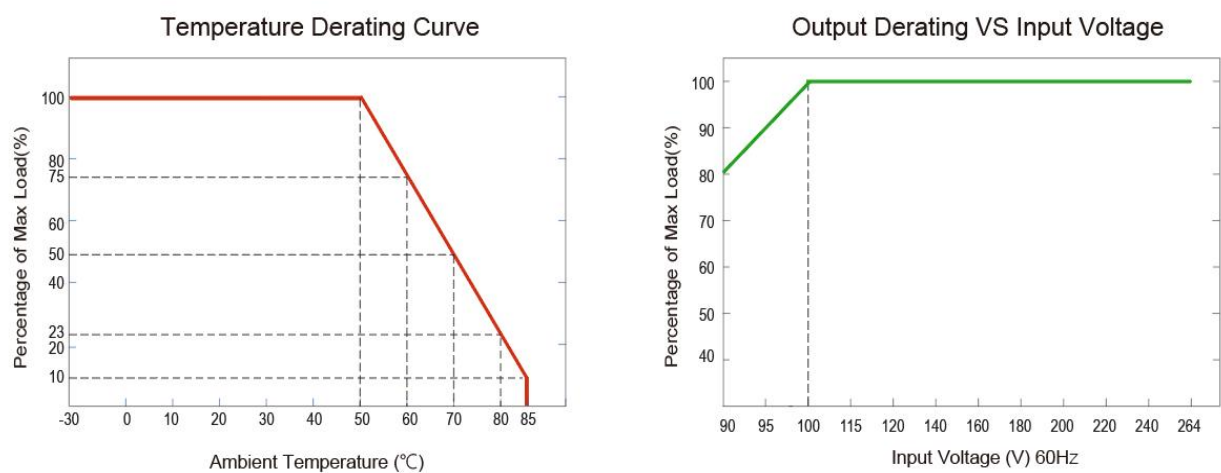

## Dimensions and Installation

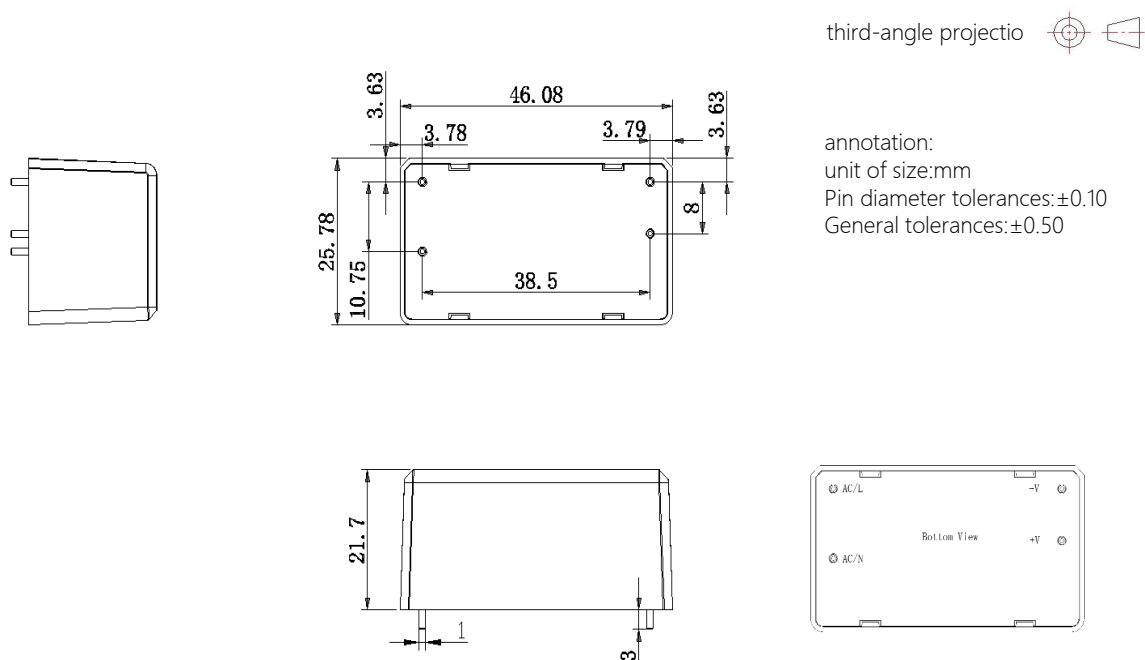

## Functional Diagram

