


YMC5 SERIES
5W




YMC5 is a 5W miniature (25.4*25.4*17.6mm) AC-DC module-type power supply, ready to be soldered onto the PCB boards of various kinds of electronic instruments or industrial automation equipments. This product allows the universal input voltage range of 85~305VAC.

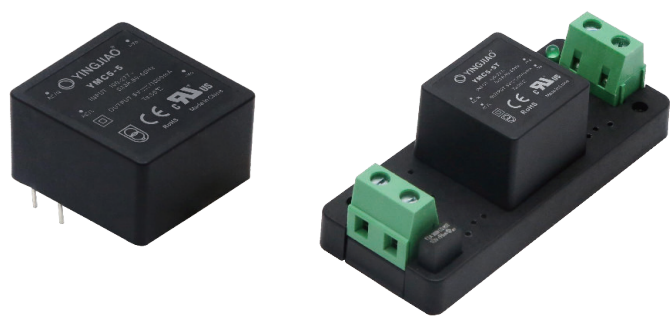

Features

- Universal AC Input/ Full Range
- No load power consumption<0.1W
- Wide operating temperature range -40~85℃
- High efficiency up to 81.5%
- 2.54x2.54cm compact size
- Protections: Short circuit/Over load/Over voltage
- Operating attitude up to 5000 meters
- Three years warranty

Model Description

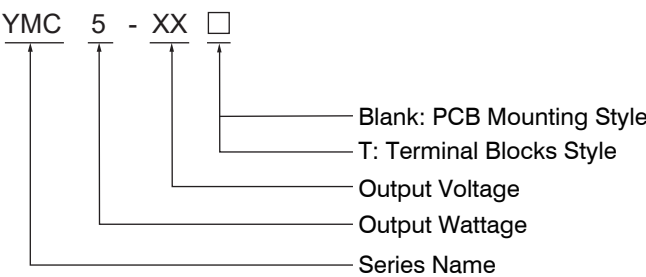

Model Information

Part number	DC Voltage	Rated Current(max.)	Rated Power	Efficiency	Max.Capacitive Load	Ripple & Noise
YMC5-3.3□	3.3V	1.515A	4.99W	69.5%	4000uF	100mVp-p
YMC5-5□	5V	1A	5W	76%	3000uF	100mVp-p
YMC5-9□	9V	0.555A	4.995W	79%	1200uF	100mVp-p
YMC5-12□	12V	0.416A	4.992W	79%	1200uF	100mVp-p
YMC5-15□	15V	0.333A	4.995W	78.5%	680uF	100mVp-p
YMC5-24□	24V	0.208A	4.992W	81.5%	220uF	100mVp-p

Specification

Model	Safety Model No.	YMC5-XX□			
Output	Voltage Tolerance	±3.0% YMC5-3.3□	± 2.0% YMM65-5/9/12/15/24□		
	Line Regulation	±0.5%			
	Load Regulation	±1.0%			
	Setup,Rise,Hold up Time	1.7s,30ms,50ms/230VAC(at full load)		1.0s,30ms,5ms/115VAC(at full load)	
Input	Rated Voltage Range	100-277VAC			
	Voltage Range	85-305VAC/100-430VDC			
	Frequency Range	47-63Hz			
	AC Current	0.15A/115VAC	0.07A/230VAC		
	Inrush Current	Cold Start 60A/400us at 230VAC 50Hz		Cold Start 30A/600us at 115VAC 50Hz	
	Leakage Current	<0.25mA/264VAC			
Protection	Over Load	110~135%			
		Shut down o/p voltage, recovers automatically after fault condition is removed.			
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.			
	Over Voltage	3.3V: 3.8~9VDC 5V:5.5~9VDC 9V: 10~16VDC 12V:13~15VDC 15V: 17~24VDC 24V: 26~34VDC			
Shut down o/p voltage, re-power on to recover.					
Ambient	Working TEMP.	-40 ~ +85 ℃ (Refer to"Derating Curve".)			
	Working Humidity	20 ~ 95%RH Non-condensing			
	Storage TEMP. Humidity	-40 ~ +105 ℃ ,10 ~ 95%RH Non-condensing			
	TEMP. Coefficient	±0.02%/(0 ~ 40 ℃)			
	Vibration	PCB Mounting: 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes Terminal Blocks: 10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes			
	Soldering Temperature	Wave soldering:260 ℃ ,5s(max.); Manual soldering:360 ℃ ,3s(max.)			
	Over Voltage Category	OVC II; According to EN61558-1; altitude up to 4000 meters			
	Safety Protection	Class II			
Safety	Safety Standards	EN60335-1 approved , design to meet :UL62368-1,BS EN62368-1, EN61558-1			
	Withstand Voltage	I/P-O/P: 4KVAC/1min			
	Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25 ℃ / 70% RH			
EMC	EMC Emission	Parameter	Standard	Test Level	
		Conducted	EN55014-1	CLASS B	
		Radiated	EN55014-1	CLASS B	
		Harmonic Current	EN61000-3-2	CLASS A	
		Voltage flicker	EN61000-3-3	
	EMC Immunity	BS EN/EN55035, BS EN/EN61000-6-2			
		Parameter	Standard	Test Level	
		ESD	EN61000-4-2	Level 3, 8KV air, Level 2, 4KV contact, criteria B	
		RF field susceptibility	EN61000-4-3	Level 3, 10V/m criteria A	
		EFT/Burest	EN61000-4-4	Level 3, ±2KV criteria B	
		Surge	EN61000-4-5	Level 3, 1KV/L-L criteria B	
		Conducted	EN61000-4-6	Level 3, 10Vr.m.s criteria A	
		Voltage Dips and interruptions	EN61000-4-11	> 95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
Others	Weight	PCB Mounting: 17.5g/pcs; Terminal Blocks: 38g/pcs;			
	Packing	PCB Mounting: 42.5 x 27.5 x 14cm 200pcs/Carton; Terminal Blocks: 57 x 27 x 19cm 100pcs/Carton			
	Dimension (LxWxH)	PCB Mounting: 25.4 × 25.4 x 17.6 mm; Terminal Blocks: 75.8 × 31.3 x 26.2 mm			
	Housing material	Plastic / UL94-V0			
	MTBF	300Khrs min. MIL-HDBK-217F(25 ℃)			
Note	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 ℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF & 47μF parallel capacitor. 3. The ambient temperature derating of 3.5 ℃ /1000m with fanless models and of 5 ℃ /1000m with fan models for operating altitude higher than 2000m (6500ft). 4. The power supply is considered as an independent unit ,but the final equipment still need to re-confirm that the whole system complies with the EMC directives.For guidance on how to perform these EMC tests,please refer to "EMI testing of component power supplies". (as available on https://yingjiao.com/wp-content/uploads/2025/06/EMI_Testing_of_Component_Power_Supplies_Yingjiao.pdf) 5. If the product is not operated within the required load range the product performance cannot be guaranteed to comply with all parameters in the datasheet. 6. When the output terminal of the product needs to be connected to PE through a Y capacitor, or close to the metal frame, please refer to the Fig. 3 for recommended circuit. 7. Unless otherwise specified, EMC performance indicators are tested according to typical application circuits (Fig. 1).				


File last modification time: 2025-7-18

YMC5 SERIES


5W

Engineering Data


Derating Curve

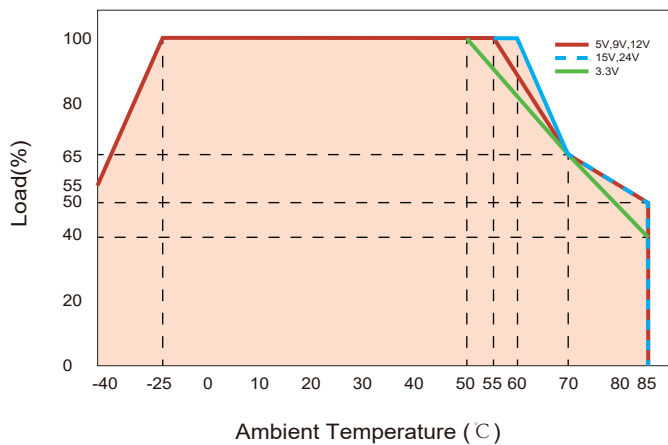

Static Characteristics

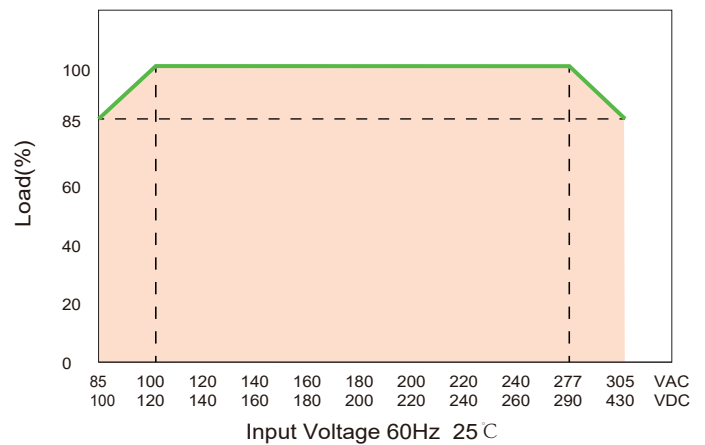


Derating Curve

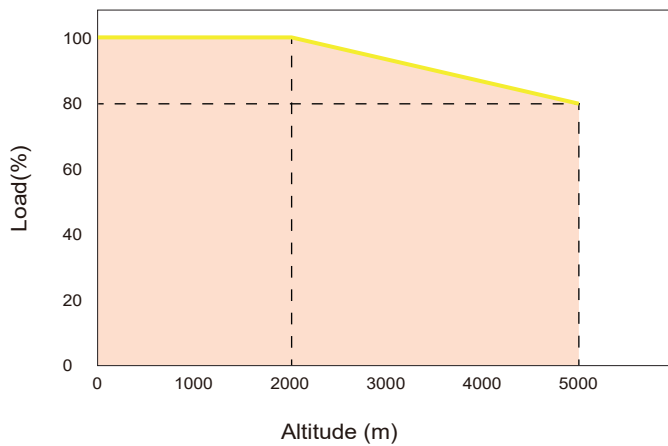

Note: 1. With an AC input between 85-100V/277-305VAC and a DC input between 100-120V/390-430VDC, the output power must be derated as per temperature derating curves.
2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult YINGJIAO.

Dimensions and installation (YMC5-XX)

(Unit: mm , tolerance: $\pm 0.5\text{mm}$)

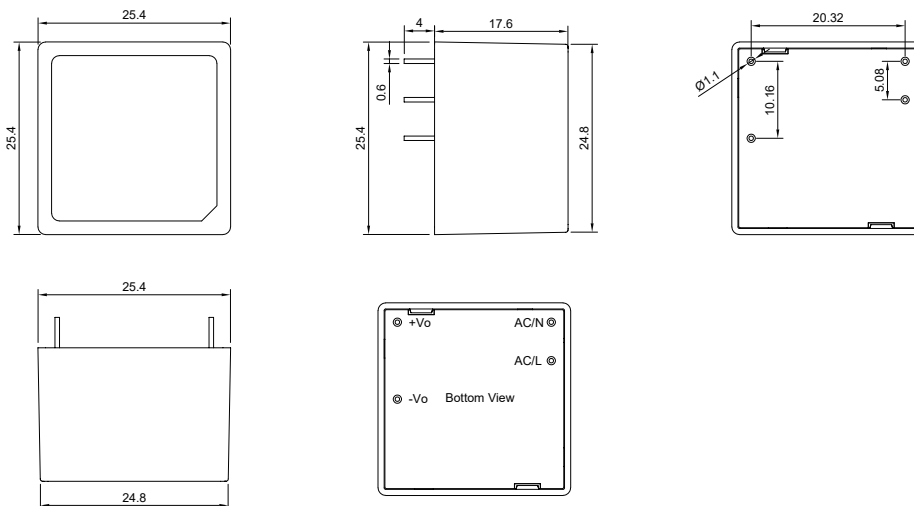


File last modification time: 2025-7-18

YMC5 SERIES

5W

Dimensions and installation (YMC5-XXT)

(Unit: mm , tolerance: $\pm 0.5\text{mm}$)

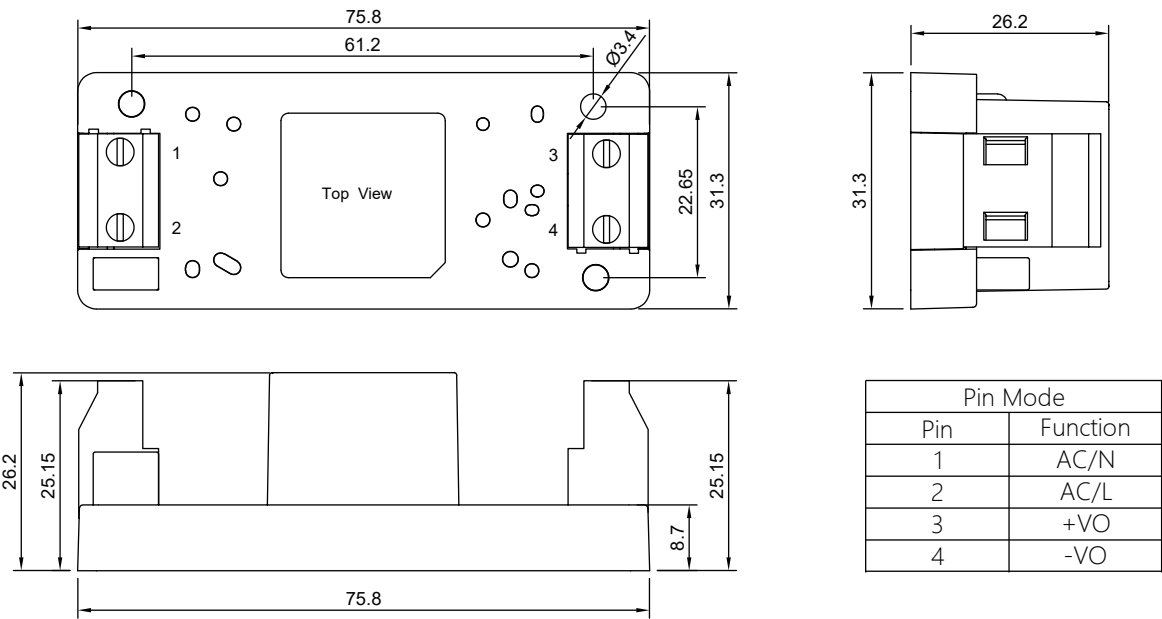

Design Reference

1. Typical application

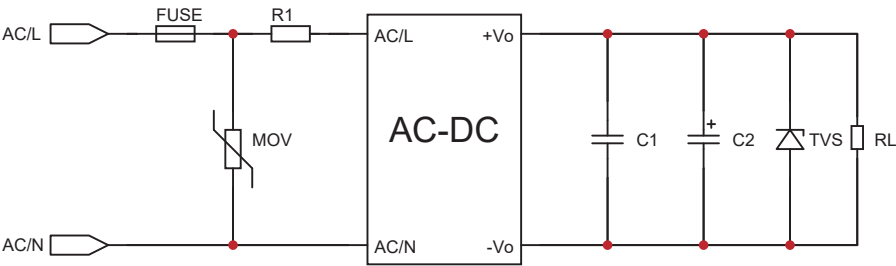


Fig.1: Typical circuit diagram

MODEL	C1(uF)	C2(uF)	FUSE	R1	TVS	MOV
YMC5-3.3□	1	150	1A/300V Slow fuse, must be connected	12Ω/3W (Winding resistor , must be connected)	SMBJ7.0A	10D561K
YMC5-5□		150			SMBJ7.0A	
YMC5-9□		120			SMBJ12A	
YMC5-12□		120			SMBJ20A	
YMC5-15□		120			SMBJ20A	
YMC5-24□		68			SMBJ30A	

Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a Capacitor voltage rating with at least 20% margin. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is arecommended suppressor diode to protect the application in case of a converter failure.

YMC5 SERIES

5W

Design Reference

2. EMC Solution - Recommended circuit

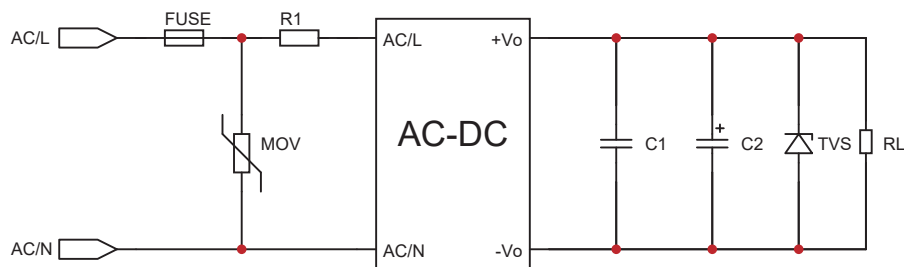


Figure 2: EMC Recommended circuits for higher requirements

Component Type	Recommended Value
MOV	14D561K
R1	33Ω/3W(Winding resistor ,must be connected)
FUSE	2A/300V Slow fuse, must be connected

3. EMC Solution - Recommended circuit

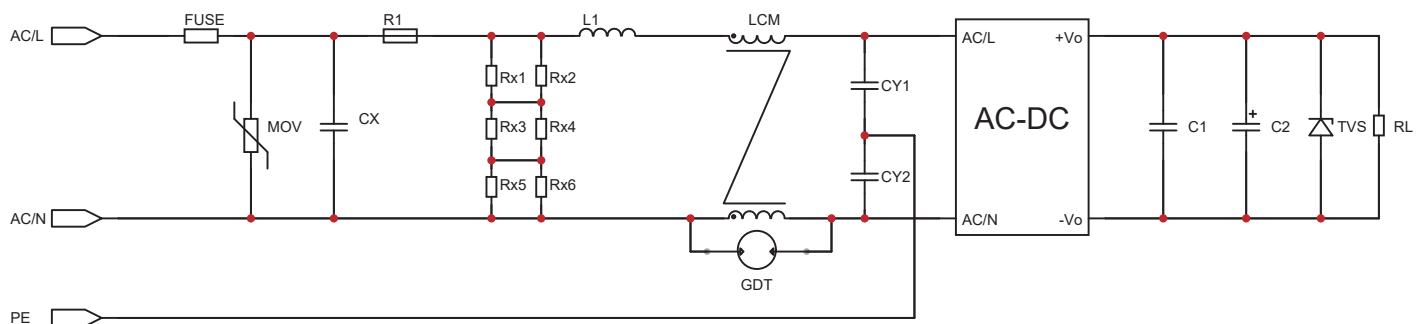


Figure 3 : I device recommendation circuit

(Recommended when the output end of the product needs to be connected to PE or connected to PE through a Y capacitor)

Component Type	Recommended Value
FUSE	2A/300V Slow fuse, must be connected
MOV	14D561K
CX	334K/305VAC
R1	33Ω/3W(Winding resistor ,must be connected)
L1	1.2mH/0.3A
CY1/CY2	1nF/400VAC
GDT	300V/1KA
LCM	20mH
Note: Rx1/Rx2/Rx3/Rx4/Rx5/Rx6 is the bleed resistance of CX, the recommended resistance value is 1.5MΩ/150VDC	