

# YEF350 SERIES

## 350W



YEF series are single-output slim type power supply and for wide range AC input from 90VAC to 305VAC.

This series has high efficiency up to 90% and operates from -30~+70 C under air convection without fan.


This series serves as a high performance power supply solution for various industrial applications.



## Features

- Universal AC Input/ Full Range
- Built-in Active PFC Function
- Fanless design,350W convection
- High efficiency up to 90%
- DC OK active signal and redundant function(option)
- Protections: Short circuit/Over load/Over voltage/Over temperature
- LED indicator for power on
- Three years warranty

## Model Description

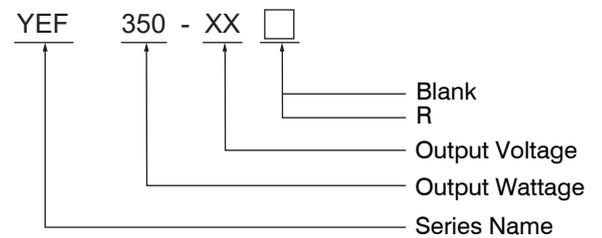

Type	Description
Blank	Enclosed
R	Buit-in DC ok active signal and redundant function

## Model Information

Part number	DC Voltage	Rated Current(max.)	Rated Power	Average Efficiency	Ripple & Noise	Max Capacitive Load	Voltage ADJ Range
YEF350-3.3□	3.3V	60A	198W	88.5%	150mVp-p	12000uF	3.2~3.5V
YEF350-4.2□	4.2V	60A	252W	89%	150mVp-p	12000uF	3.6~4.4V
YEF350-5□	5V	60A	300W	89.5%	200mVp-p	12000uF	4.5~5.5V
YEF350-12□	12V	29.2A	350.4W	90%	200mVp-p	10000uF	11.4~12.6V
YEF350-15□	15V	23.4A	351W	90.5%	200mVp-p	9000uF	14.3~15.8V
YEF350-24□	24V	14.6A	350.4W	90%	240mVp-p	8000uF	22.8~25.2V
YEF350-36□	36V	9.75A	351W	90.5%	240mVp-p	6000uF	34.2~37.8V
YEF350-48□	48V	7.3A	350.4W	91%	240mVp-p	4000uF	45.6~50.4V
YEF350-55□	55V	6.4A	352W	91.5%	300mVp-p	3000uF	45~58V

# YEF350 SERIES

## 350W

### Specification


Model	Safety Model No.	YEF350-XX□	
Output	Setup,Rise,Hold up Time	2.0s,80ms,10ms/230VAC(at full load)	3.0s,80ms,10ms/115VAC(at full load)
	Voltage Tolerance	±2.0% YEF350-3.3/4.2/5□	±1.0% YEF350-12/15/24/36/48/55□
	Line Regulation	±0.5% YEF350-3.3/4.2/5□	±0.3% YEF350-12/15/24/36/48/55□
	Load Regulation	±1.0% YEF350-3.3/4.2/5□	±0.5% YEF350-12/15/24/36/48/55□
Input	Rated Voltage Range	100-277VAC	
	Voltage Range	90-305VAC/127-430VDC	
	Frequency Range	50/60Hz	
	AC Current	4.6A/115VAC	2.3A/230VAC
	Inrush Current	Cold Start 60A/2000us at 230VAC 50Hz	Cold Start 30A/1500us at 115VAC 50Hz
	Leakage Current	<0.75mA/240VAC	
	Power Factor(Typ.)	>0.94/230VAC at full load	>0.98/115VAC at full load
Protection	Over Load	110~140%Rated Output Power Hiccup mode, recovers automatically after fault condition is removed.	
	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.	
	Over Voltage	115~135%Rated Output Voltage Hiccup mode, recovers automatically after fault condition is removed.	
	Over Temperature	Shut down o/p voltage, recovers automatically after temperature goes down.	
	Ambient	Working TEMP.	-30 ~ +70 C (Please refer to "Derating Curve"section)
Working Humidity		20 ~ 95%RH Non-condensing	
Storage TEMP. Humidity		-40 ~ +85 C , 10 ~ 95%RH Non-condensing	
TEMP. Coefficient		±0.03%/(0 ~ 50 C ) on load output	
Vibration		Component: 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes	
Safety Protection		Class I	
Over Voltage Category		OVC III / According to EN62368-1;altitude up to 2000 meters	
Safety	Safety Standards	EN62368-1, UL62368-1 approved , design to meet :BS EN62368-1, EN60335-1, EN61558-1	
	Withstand Voltage	I/P-O/P:3.75KVAC/1min I/P-FG:2KVAC/1min O/P-FG:1.25KVAC/1min	
	Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25 C / 70% RH	
EMC	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class A-D,BS EN/EN61000-3-3	
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-11 Criteria B, BS EN/EN61000-4-2,3,4,5,6,8 Criteria A, BS EN/EN55035	
Others	Packing	700g/pcs; 30 x 28.5 x 23.5 cm; 20pcs/carton	
	Dimension (LxWxH)	222 x 62 x 31 mm	
	MTBF	188.4Khrs min. MIL-HDBK-217F(25 C )	
	Housing material	Aluminium / steel	
Note	<p>1.All parameters NOT specially mentioned at 230VAC input, rated load and 25 C of ambient temperature.</p> <p>2.Ripple &amp; noise are measured from peak to peak with bandwidth limit of 20MHz (0.1uF and 47uF/50V parallel capacitor under DC output full load, AC nominal input 25 C ).</p> <p>3.The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies". (as available on <a href="https://yingjiao.com/wp-content/uploads/2025/06/EMI_Testing_of_Component_Power_Supplies_Yingjiao.pdf">https://yingjiao.com/wp-content/uploads/2025/06/EMI_Testing_of_Component_Power_Supplies_Yingjiao.pdf</a>)</p> <p>4.Derating may be needed under low input voltage .Please check the derating curve for more details.</p> <p>5.Strongly recommended that external output capacitance should not exceed 10000uF(Only for the models with output voltage 5/12V)</p> <p>6.The ambient temperature derating of 3.5 C /1000m for operating altitude higher than 2000m(6500ft).</p> <p>7. Only for Blank type,R type efficiency slightly less than the Blank type</p> <p>8. Inrush current parameter has 10% tolerance.</p>		

# YEF350 SERIES

## 350W

### Drawing & Label

(Unit: mm , tolerance: ±1mm)

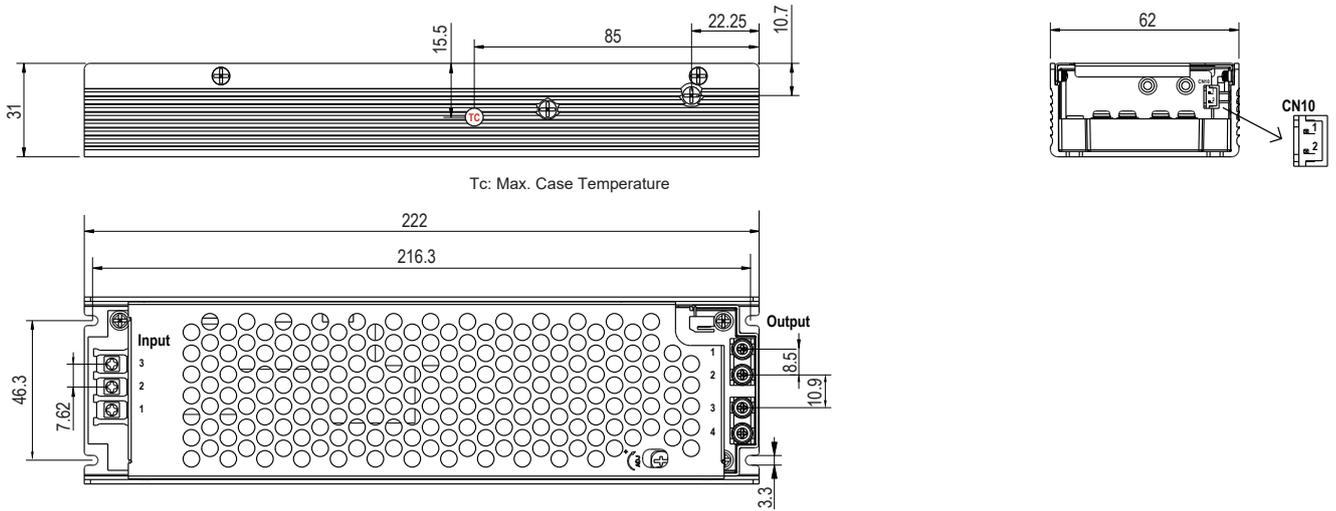

AC Input Terminal pin NO.Assignment

Pin No.	Assignment	Terminal	Max mounting torque
1	AC/L	BHN 1.5-XX-7.62-02-T1-C	0.79N·m
2	AC/N		
3	⊥		

DC Output Terminal pin NO.Assignment


Pin No.	Assignment	Terminal	Max mounting torque
1,2	-V	MFR 06426-T2	1.47N·m
3,4	+V		

DC OK Connector(CN10): DL20001-AWD or requivalent

Pin No.	Assignment	Mating Housing	Terminal
1	DC COM	DL20001-AWD	DL20001-PH-AWD
2	DC OK+V		

### Installation

- Operate with additional aluminum plate  
 In order to meet the "Derating Curve" and the "static Characteristics", YEF350 series must be installed onto an aluminum plate (or the cabinet of the same size) on the bottom. The size of the suggested aluminum plate is shown as below. And for optimizing thermal performance, the aluminum plate must have an even and smooth surface (or coated with thermal grease), and YEF350 series must be firmly mounted at the center of the aluminum plate.

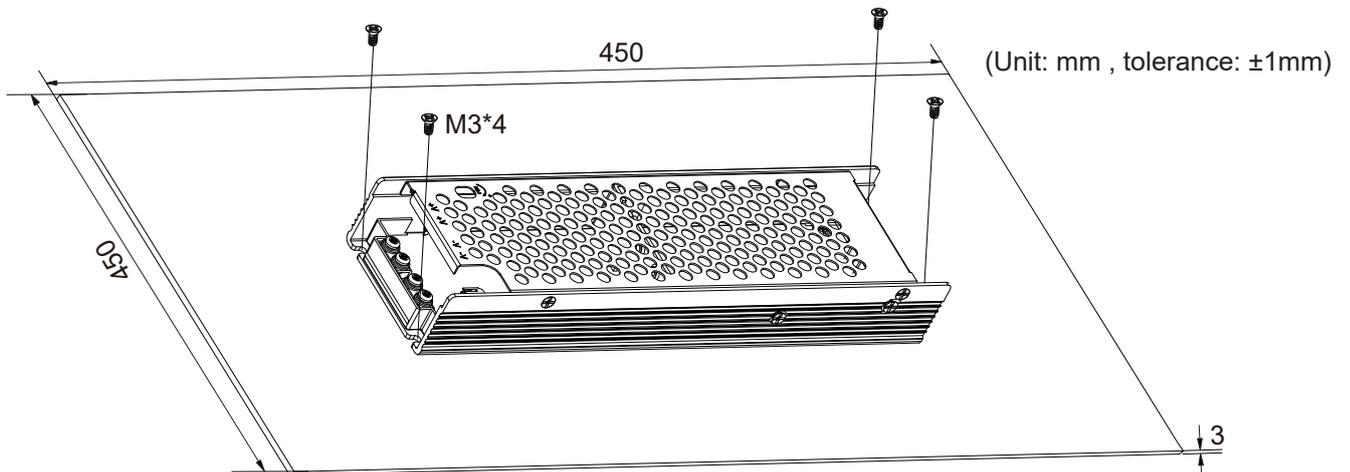


File last modification time: 2026-03-10

# YEF350 SERIES


## 350W

### Block Diagram

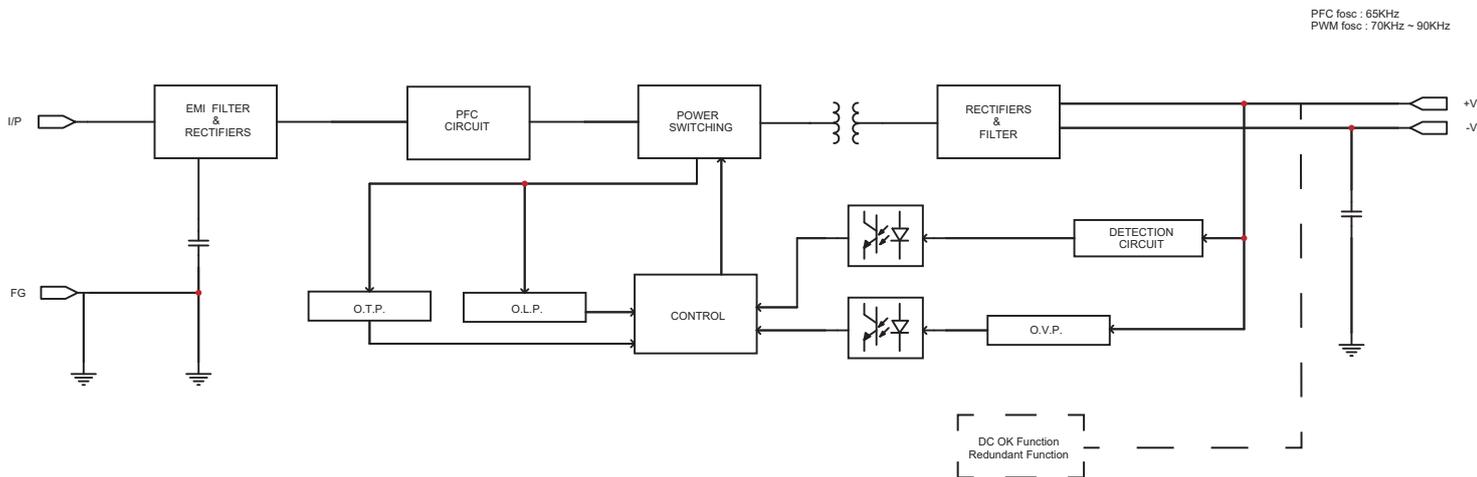


### Engineering Data


#### Derating Curve

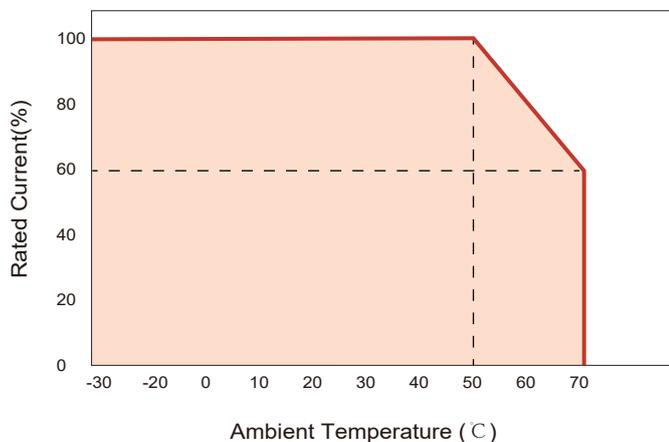


#### Static Characteristics

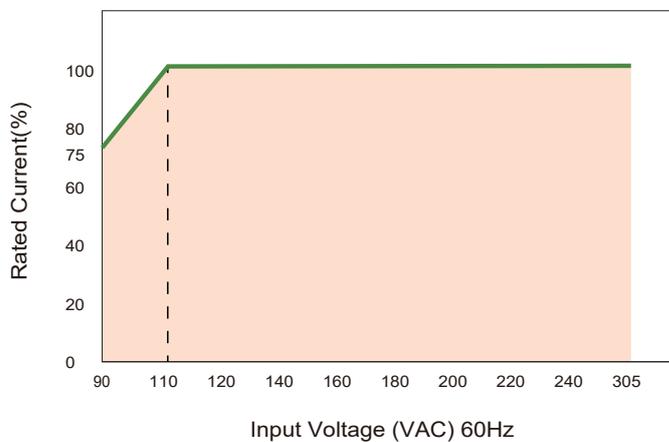

#### Derating Curve

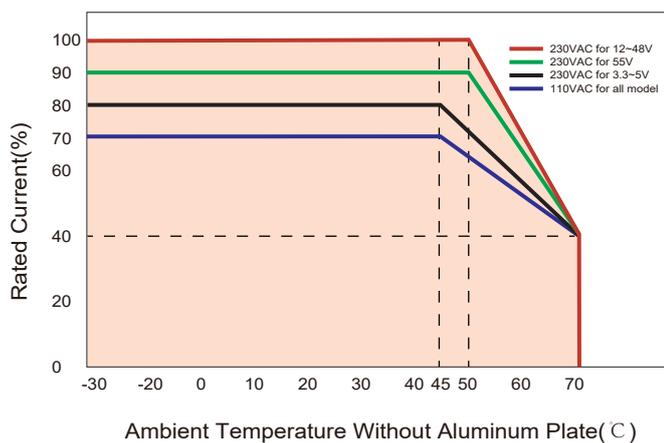

#### Tc VS Rated Current

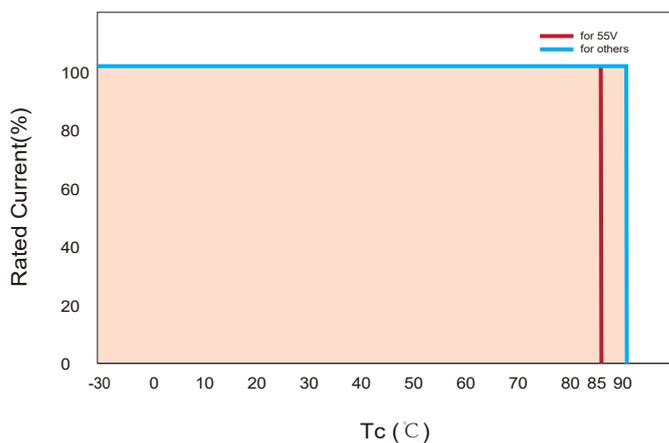

File last modification time: 2026-03-10

# YEF350 SERIES

## 350W


### Function

DC OK Signal(Optional)	Contact rating(max.): 15VDC/10mA resistive load
Redundant(Optional)	For parallel connection protection: For parallel applications, when one PSU can not work, the another one will be automatically enabled. This can prevent the system crash, and provide the reliability of system

### Function Manual

#### 1. DC OK Singal

DC OK is a collector shorted signal. It is used by an optocoupler in the power supply which indicates the output status of the power supply as exhibited below.

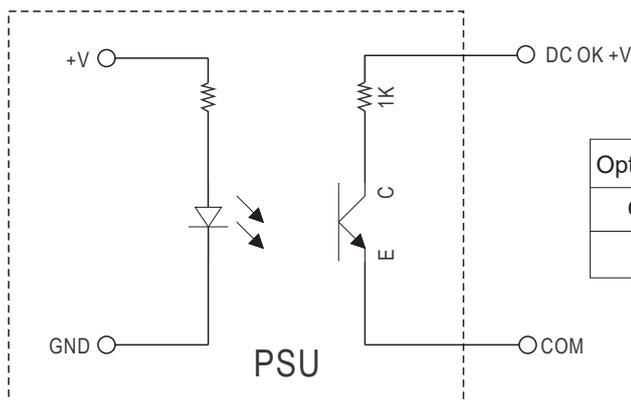

Optocoupler C-E Pin Conduction	PSU turns on	DC OK
Optocoupler C-E Pin Open	PSU turns off	DC Fail
Optocoupler Rating(Max.)	15VDC/10mA resistive load	

#### 2. Redundant Function

(1) YEF350-XXR is built-in redundant function and can be connected 2 units in parallel.

(2) When in parallel operation the maximum load should not be greater than the rated power of any PSU.

