

YS6V-U SERIES

6W



Features

- Energy efficiency level VI
- Class II Power Supply
- 3 Years Warranty
- Universal AC input/Full range
- No load power consumption < 0.1W
- Protections: Short Circuit /Over Load / Over Voltage
- -20~+70℃ wide range working temperature

Applications

- Digital Equipment
- Industrial Equipments
- Consumer Electronic Devices
- Telecommunication Devices







Model Description

YS6V - XXXYYYY U-D1J

- DC Plug Type { D1J: standard model, $\phi 2.1 \times \phi 5.5 \times 11\text{mm}$, C+, tuning fork type
Other options available by customer requested (see Page3-5)
- US Plug
- Output Current
- Output Voltage
- Series Name

Dimensions and installation

(Unit: mm , tolerance: $\pm 1\text{mm}$)

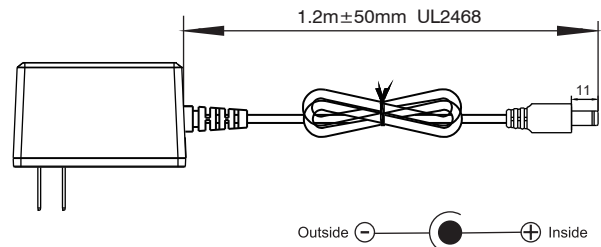

Standard Cable	1.2m UL2468 (Option: UL2464, UL1185)
5 ~ 6V	22AWG
7.5 ~ 36V	24AWG

YS6V-U SERIES

6W


Specification

Model	Order P/N	YS6V-0501200U-D1J	YS6V-0601000U-D1J	YS6V-0750800U-D1J	YS6V-0900600U-D1J	YS6V-1200500U-D1J	YS6V-2400250U-D1J	YS6V-3600160U-D1J
	Safety Model No.	YS6V-0501200	YS6V-0601000	YS6V-0750800	YS6V-0900600	YS6V-1200500	YS6V-2400250	YS6V-3600160
Output	DC Voltage	5V	6V	7.5V	9V	12V	24V	36V
	Rated Current	1.2A	1A	0.8A	0.6A	0.5A	0.25A	0.16A
	Rated Power	6W	6W	6W	5.4W	6W	6W	5.76W
	Ripple & Noise(max.)	75mVp-p	75mVp-p	90mVp-p	90mVp-p	120mVp-p	240mVp-p	300mVp-p
	Voltage Tolerance	±5%	±5%	±5%	±5%	±5%	±5%	±5%
	Line Regulation	±3%	±3%	±3%	±3%	±3%	±3%	±3%
	Load Regulation	±5%	±5%	±5%	±5%	±5%	±5%	±5%
	Setup,Rise,Hold up Time	1.0s,30ms,80ms/230VAC(at full load)				2.0s,30ms,13ms/115VAC(at full load)		
Input	Rated Voltage Range	100-240VAC						
	Voltage Range	90-264VAC						
	Frequency Range	50/60Hz						
	AC Current	0.2A/115VAC		0.15A/230VAC				
	Inrush Current	Cold Start 50A/200us at 230VAC 50Hz				Cold Start 30A/200us at 115VAC 50Hz		
	Leakage Current	<0.25mA/230VAC						
	Efficiency	75%	79.5%	79%	78.5%	80%	80%	80.5%
	No Load Power Consumption	<0.1W						
Protection	Over Load	105~150%						
		Hiccup mode, recovers automatically after fault condition is removed.						
	Short Circuit	Shut down o/p voltage, re-power on to recover.						
	Over Voltage	120~180%						
Shut down o/p voltage, re-power on to recover.								
Ambient	Working TEMP.	-20 ~ +70 ℃ (Please refer to “Derating Curve”section)						
	Working Humidity	20 ~ 95%RH Non-condensing						
	Storage TEMP. Humidity	-40 ~ +85 ℃ ,10 ~ 95%RH Non-condensing						
	TEMP. Coefficient	±0.03%/(0 ~ 40 ℃)						
	Vibration	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes						
Safety	Safety Standards	IEC/UL 62368-1						
	Withstand Voltage	I/P-O/P: 3KVAC/1min						
	Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25 ℃ / 70% RH						
EMC	EMC Emission	Parameter	Standard			Test Level		
		Conducted	FCC Part15(CISPR22)			CLASS B		
		Radiated	FCC Part15(CISPR22)			CLASS B		
Others	Packing	85g/pcs; 45 x 28.5 x 32 cm; 100pcs/carton						
	Dimension (LxWxH)	58 x 26 x 37 mm						
	Plug and Cable	See page 3~5; Other type available by customer requested						
	MTBF	223.6Khrs min. MIL-HDBK-217F(25 ℃)						
Note	1. Tolerance: includes set up tolerance, line regulation and load regulation. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 0% to 100% rated load. 5. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 ℃ of ambient temperature. 6. De-rating may be needed under low input voltages. Please refer to “Static Characteristic” sections for details. 7. The power supply is considered as a component that will be operated in combination with final equipment.Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.							


YS6V-U SERIES
6W

Feature Curves

1. Derating Curve

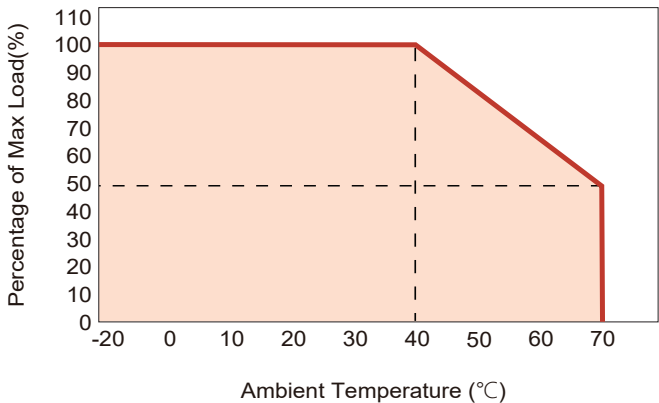


2. Static Characteristics

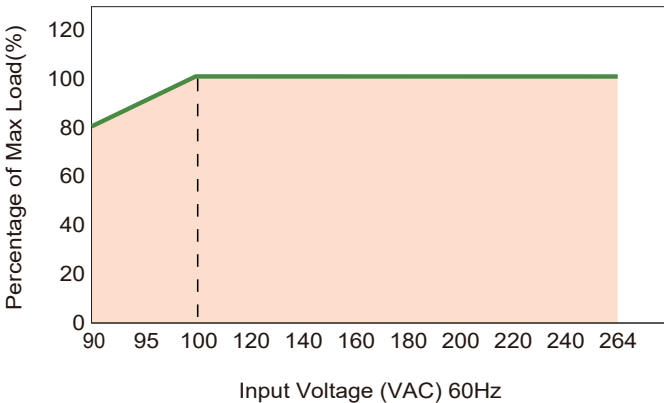







DC Output Plug (Option)

Standard Model : D1J

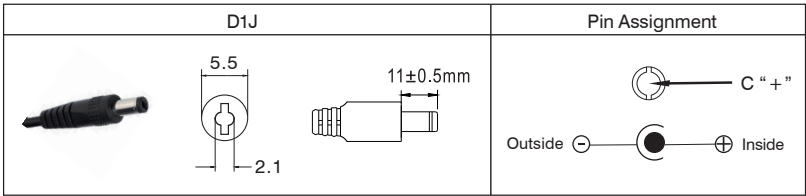

Optional DC plug:
(Unit: mm , tolerance: ±0.5mm)




Tuning Fork Style			
Type No.	A	B	C
	OD	ID	L
D1I	5.5	2.1	9.5
D1L	5.5	2.5	9.5
D1M	5.5	2.5	11.0




Tuning Fork Style			
Type No.	A	B	C
	OD	ID	L
D1IR	5.5	2.1	9.5
D1JR	5.5	2.1	11.0
D1LR	5.5	2.5	9.5
D1MR	5.5	2.5	11.0




YS6V-U SERIES




6W




DC Output Plug (Option)




Barrel Style				Straight
Type No.	A	B	C	
	OD	ID	L	
D2I	5.5	2.1	9.5	
D2J	5.5	2.1	11.0	
D2L	5.5	2.5	9.5	
D2M	5.5	2.5	11.0	

Barrel Style				Right-angled
Type No.	A	B	C	
	OD	ID	L	
D2IR	5.5	2.1	9.5	
D2JR	5.5	2.1	11.0	
D2LR	5.5	2.5	9.5	
D2MR	5.5	2.5	11.0	

Tuning Fork Style				EIAJ equivalent
Type No.	A	B	C	
	OD	ID	L	
D3A	2.35	0.7	11.0	
D3B	4.0	1.7	11.0	
D3C	4.75	1.7	11.0	


Center Pin Style				EIAJ equivalent
Type No.	A	B	C	D
	OD	ID	L	Center Pin
D4A	5.5	3.4	11.0	1.0
D4B	6.5	4.4	11.0	1.4
D4C	7.4	5.1	11.0	0.6


Barrel Style			
Type No.	Pin Assignment		
	PIN No.	Output	
M1B	1	-Vo	
	2	-Vo	
	3	+Vo	
	4	-Vo	
	5	+Vo	


MIN.Din 3Pin with Lock(male)				KYCON KPPX-3P equivalent
Type No.	Pin Assignment			
	PIN No.	Output		
M6B	1	+Vo		
	2	-Vo		
	3	+Vo		


YS6V-U SERIES
6W

DC Output Plug (Option)

MIN.Din 4Pin with Lock(male)		
	KYCON KPPX-4P equivalent	
Type No.	Pin Assignment	
	PIN No.	Output
M7B	1	+Vo
	2	-Vo
	3	-Vo
	4	+Vo

MIN.Din 4Pin with Lock(female)		
	KYCON KPJX-CM-4S equivalent	
Type No.	Pin Assignment	
	PIN No.	Output
M7BF	1	+Vo
	2	-Vo
	3	-Vo
	4	+Vo

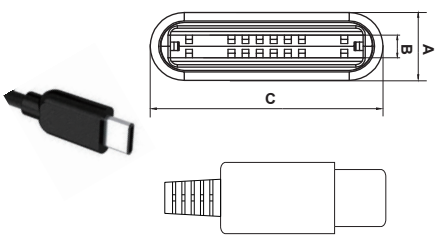Type-C			
Type No.	A	B	C
	OD	ID	L
C1	2.4	1.3	8.25

Stripped and tinned leads	 <p>Length of Land L1 by request YJ's standard length, L: 30 mm, L1: 5 mm NOTE: The wire color is for reference only, please refer to the actual product</p>	
Type No.	Pin Assignment	
	PIN No.	Output
by customer	1	+Vo
	2	-Vo