

YS40C-E SERIES

48W



Features

- Energy efficiency level VI
- Class II Power Supply
- 3 Years Warranty
- Universal AC input/Full range
- No load power consumption < 0.1W
- Protections: Short Circuit /Over Load / Over Voltage
- -20~+50℃ wide range working temperature

Applications

- Digital Equipment
- Industrial Equipments
- Consumer Electronic Devices
- Telecommunication Devices




Model Description

YS40C - XXXYYYY E-D1J

- DC Plug Type { D1J: standard model, $\phi 2.1 \times \phi 5.5 \times 11\text{mm}$, C+, tuning fork type
Other options available by customer requested (see Page3-5)
- EU Plug
- Output Current
- Output Voltage
- Series Name

Dimensions and installation

(Unit: mm , tolerance: $\pm 1\text{mm}$)

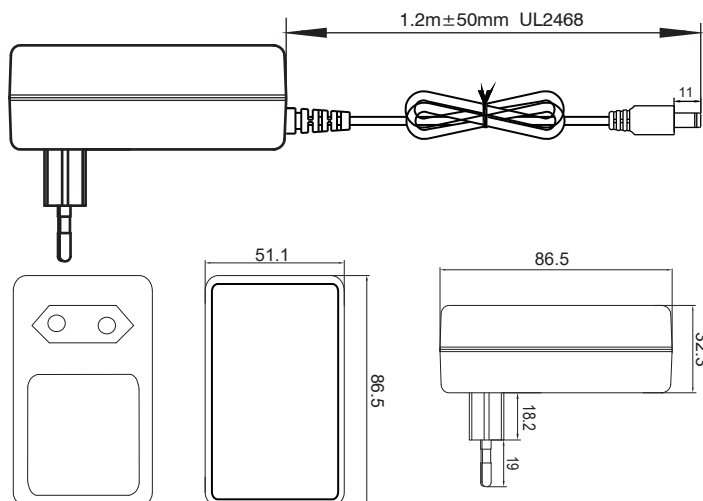

Standard Cable	1.2m UL2468 (Option: UL2464, UL1185)
9 ~ 12V	18AWG
24 ~ 48V	22AWG



Specification


Model	Order P/N	YS40C-0904000E-D1J	YS40C-1204000E-D1J	YS40C-2402000E-D1J	YS40C-3601330E-D1J	YS40C-4801000E-D1J
	Safety Model No.	YS40C-0904000	YS40C-1204000	YS40C-2401500	YS40C-3601330	YS40C-4801000
Output	DC Voltage	9V	12V	24V	36V	48V
	Rated Current	4A	4A	2A	1.33A	1A
	Rated Power	36W	48W	48W	48W	48W
	Ripple & Noise(max.)	90mVp-p	120mVp-p	200mVp-p	300mVp-p	400mVp-p
	Voltage Tolerance	±5%	±5%	±5%	±5%	±5%
	Line Regulation	±3%	±3%	±3%	±3%	±3%
	Load Regulation	±5%	±5%	±5%	±5%	±5%
	Setup,Rise,Hold up Time	1.0s,30ms,80ms/230VAC(at full load)			2.0s,30ms,12ms/115VAC(at full load)	
Input	Rated Voltage Range	100-240VAC				
	Voltage Range	90-264VAC				
	Frequency Range	50/60Hz				
	AC Current	0.2A/115VAC		0.21A/230VAC		
	Inrush Current	Cold Start 30A/200us at 230VAC 50Hz			Cold Start 15A/200us at 115VAC 50Hz	
	Leakage Current	<0.25mA/230VAC				
	Efficiency	88%	88.5%	88%	88.5%	89%
	No Load Power Consumption	<0.1W				
Protection	Over Load	105~150%				
		Hiccup mode, recovers automatically after fault condition is removed.				
	Short Circuit	Recovers automatically after fault condition is removed.				
	Over Voltage	120~180%				
Shut down o/p voltage, re-power on to recover						
Ambient	Working TEMP.	-20 ~ +50 ℃ (Please refer to “Derating Curve”section)				
	Working Humidity	20 ~ 95%RH Non-condensing				
	Storage TEMP. Humidity	-40 ~ +85 ℃ , 10 ~ 95%RH Non-condensing				
	TEMP. Coefficient	±0.03%/(0 ~ 40 ℃)				
	Vibration	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes				
Safety	Safety Standards	EN61558				
	Withstand Voltage	I/P-O/P: 3KVAC/1min				
	Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25 ℃ / 70% RH				
EMC	EMC Emission	Parameter	Standard		Test Level	
		Conducted	EN55014		Clause 4.3.3	
		Radiated	EN55014		Clause 4.3.4	
		Harmonic Current	EN61000-3-2		Clause 7	
		Voltage flicker	EN61000-3-3		Clause 7	
	EMC Immunity	Parameter	Standard		Test Level	
		ESD	EN61000-4-2		Level 3, 8KV air, criteria A	
		Radiated Susceptibility	EN61000-4-3		Level 3, criteria A	
		EFT/Burest	EN61000-4-4		Level 3, criteria A	
		Surge	EN61000-4-5		Level 4, 2KV/L-N, criteria A	
		Conducted	EN61000-4-6		Level 3, criteria A	
		Magnetic Field	EN61000-4-8		Level 4, criteria A	
		Voltage Dips and interruptions	EN61000-4-11		> 95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
Others	Packing	180g/pcs; 42.5 x 22.5 x 29 cm; 50pcs/carton				
	Dimension (LxWxH)	86.5 x 51.1 x 32.3 mm				
	Plug and Cable	See page 3~5; Other type available by customer requested				
	MTBF	153.6Khrs min. MIL-HDBK-217F(25 ℃)				
Note	1. Tolerance: includes set up tolerance, line regulation and load regulation. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 0% to 100% rated load. 5. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 ℃ of ambient temperature. 6. De-rating may be needed under low input voltages. Please refer to “Static Characteristic” sections for details. 7. The power supply is considered as a component that will be operated in combination with final equipment.Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.					

File last modification time: 2025-2-25


YS40C-E SERIES
48W

Feature Curves

1. Derating Curve

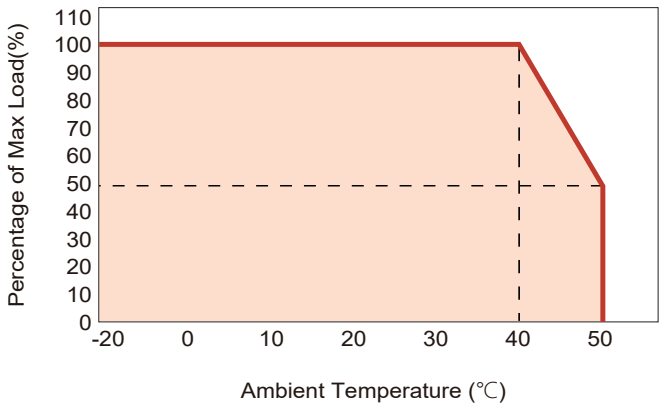


2. Static Characteristics

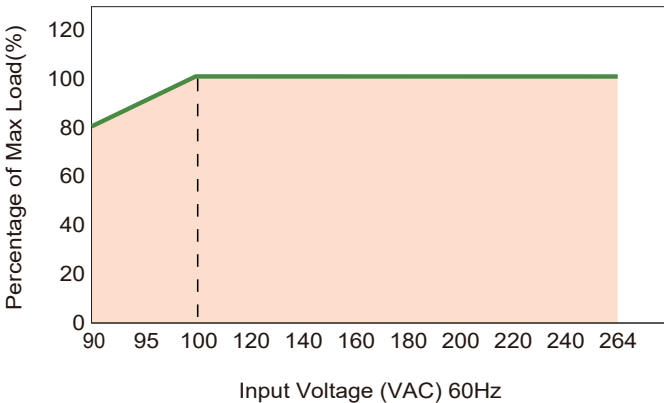

DC Output Plug (Option)

Standard Model : D1J

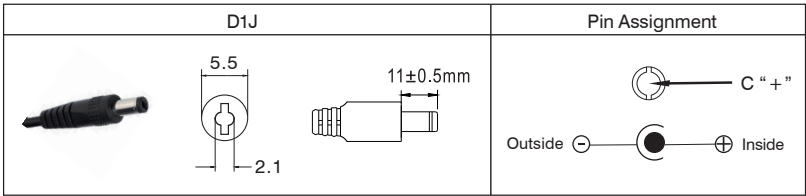

Optional DC plug:
(Unit: mm , tolerance: ±0.5mm)




Tuning Fork Style			Straight
Type No.	A	B	C
	OD	ID	L
D1I	5.5	2.1	9.5
D1L	5.5	2.5	9.5
D1M	5.5	2.5	11.0




Tuning Fork Style			Right-angled
Type No.	A	B	C
	OD	ID	L
D1IR	5.5	2.1	9.5
D1JR	5.5	2.1	11.0
D1LR	5.5	2.5	9.5
D1MR	5.5	2.5	11.0




YS40C-E SERIES




48W




DC Output Plug (Option)




Barrel Style				Straight
Type No.	A	B	C	
	OD	ID	L	
D2I	5.5	2.1	9.5	
D2J	5.5	2.1	11.0	
D2L	5.5	2.5	9.5	
D2M	5.5	2.5	11.0	

Barrel Style				Right-angled
Type No.	A	B	C	
	OD	ID	L	
D2IR	5.5	2.1	9.5	
D2JR	5.5	2.1	11.0	
D2LR	5.5	2.5	9.5	
D2MR	5.5	2.5	11.0	

Tuning Fork Style				EIAJ equivalent
Type No.	A	B	C	
	OD	ID	L	
D3A	2.35	0.7	11.0	
D3B	4.0	1.7	11.0	
D3C	4.75	1.7	11.0	

Center Pin Style				EIAJ equivalent
Type No.	A	B	C	D
	OD	ID	L	Center Pin
D4A	5.5	3.4	11.0	1.0
D4B	6.5	4.4	11.0	1.4
D4C	7.4	5.1	11.0	0.6


Barrel Style			
Type No.	Pin Assignment		
	PIN No.	Output	
M1B	1	-Vo	
	2	-Vo	
	3	+Vo	
	4	-Vo	
	5	+Vo	


MIN.Din 3Pin with Lock(male)			
Type No.	Pin Assignment		
	PIN No.	Output	
M6B	1	+Vo	
	2	-Vo	
	3	+Vo	


YS40C-E SERIES


48W

DC Output Plug (Option)

MIN.Din 4Pin with Lock(male)		
	KYCON KPPX-4P equivalent	
Type No.	Pin Assignment	
	PIN No.	Output
M7B	1	+Vo
	2	-Vo
	3	-Vo
	4	+Vo

MIN.Din 4Pin with Lock(female)		
	KYCON KPJX-CM-4S equivalent	
Type No.	Pin Assignment	
	PIN No.	Output
M7BF	1	+Vo
	2	-Vo
	3	-Vo
	4	+Vo

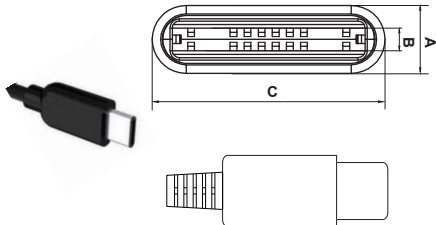Type-C			
Type No.	A	B	C
	OD	ID	L
C1	2.4	1.3	8.25

Stripped and tinned leads	 <p>Length of Land L1 by request YJ's standard length, L: 30 mm, L1: 5 mm NOTE: The wire color is for reference only, please refer to the actual product</p>	
Type No.	Pin Assignment	
	PIN No.	Output
by customer	1	+Vo
	2	-Vo