

YSC120 SERIES
120W



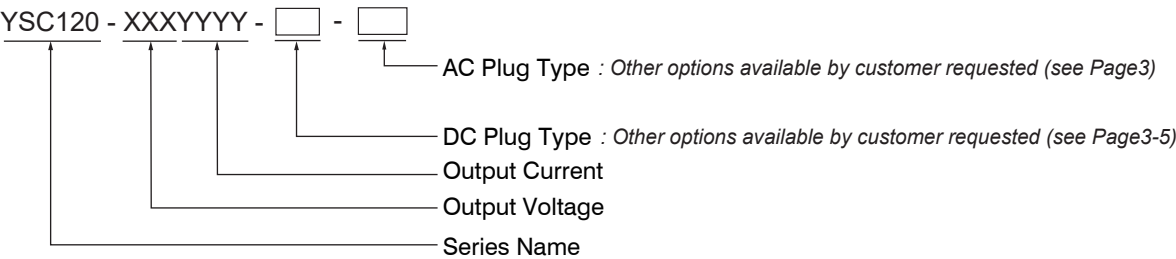
Features

- IP67
- Energy efficiency level VI
- Class II Power Supply
- 3 Years Warranty
- Universal AC input/Full range
- No load power consumption < 0.21W
- Protections: Short Circuit /Over Load / Over Voltage
- -20~+70℃wide range working temperature

Applications

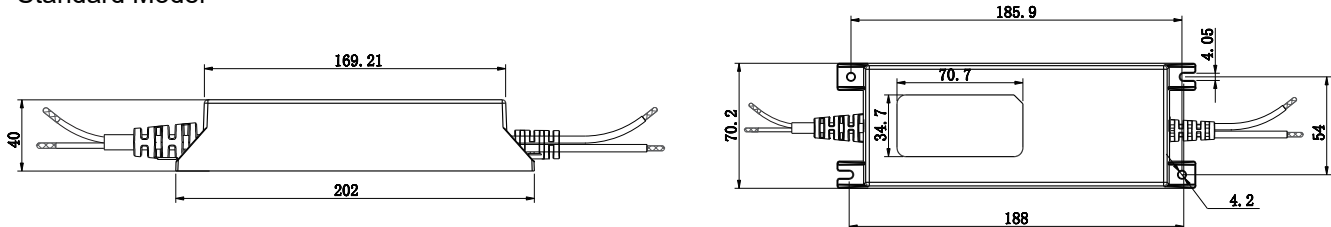
- Office Facilities
- Industrial Equipments
- Consumer Electronic Devices
- Telecommunication Devices
- Security Alarm System

Model Description



Dimensions and installation

Standard Model



Standard AC Cable	200mm PVC 2*0.5mm²
Standard DC Cable	200mm UL2464 (Option: UL2468, UL1185)
9 ~ 15V	18AWG
24V	20AWG
36V	22AWG

Specification

Model	Order P/N	YSC120-0906000 - □ - □	YSC120-1206000 - □ - □	YSC120-1506000 - □ - □	YSC120-2405000 - □ - □	YSC120-3603330 - □ - □
	Safety Model No.	YSC120-0906000	YSC120-1206000	YSC120-1506000	YSC120-2405000	YSC120-3603330
Output	DC Voltage	9V	12V	15V	24V	36V
	Rated Current	6A	6A	6A	5A	3.33A
	Rated Power	54W	72W	90W	120W	120W
	Ripple & Noise(max.)	100mVp-p	150mVp-p	150mVp-p	200mVp-p	300mVp-p
	Voltage Tolerance	±5%	±5%	±5%	±5%	±5%
	Line Regulation	±3%	±3%	±3%	±3%	±3%
	Load Regulation	±5%	±5%	±5%	±5%	±5%
	Setup,Rise,Hold up Time	3.0s,30ms,120ms/230VAC(at full load)			3.0s,30ms,25ms/115VAC(at full load)	
Input	Rated Voltage Range	220-240VAC				
	Voltage Range	200-265VAC				
	Frequency Range	50/60Hz				
	AC Current	1.3A/115VAC		0.6A/230VAC		
	Inrush Current	Cold Start 60A/200us at 230VAC 50Hz			Cold Start 40A/200us at 115VAC 50Hz	
	Leakage Current	<0.25mA/230VAC				
	Efficiency	89%	89.5%	89%	90%	91%
	No Load Power Consumption	<0.21W				
Protection	Over Load	110~180% Hiccup mode, recovers automatically after fault condition is removed.				
	Short Circuit	Shut down o/p voltage, re-power on to recover.				
	Over Voltage	105~150% Shut down o/p voltage, re-power on to recover.				
Ambient	Working TEMP.	-20 ~ +70 ℃ (Please refer to “Derating Curve”section)				
	Working Humidity	20 ~ 95%RH Non-condensing				
	Storage TEMP. Humidity	-40 ~ +85 ℃, 10 ~ 95%RH Non-condensing				
	TEMP. Coefficient	±0.03%/(0 ~ 40 ℃)				
	Vibration	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes				
Safety	Safety Standards	EN 61558				
	Withstand Voltage	I/P-O/P: 3KVAC/1min				
	Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25 ℃ / 70% RH				
EMC	EMC Emission	Parameter	Standard		Test Level	
		Conducted	EN55032(CISPR32)		CLASS B	
		Radiated	EN55032(CISPR32)		CLASS B	
		Harmonic Current	EN61000-3-2		CLASS B	
		Voltage flicker	EN61000-3-3		CLASS B	
	EMC Immunity	Parameter	Standard		Test Level	
		ESD	EN61000-4-2		Level 3, 8KV air, criteria A	
		Radiated Susceptibility	EN61000-4-3		Level 3, criteria A	
		EFT/Burest	EN61000-4-4		Level 3, criteria A	
		Surge	EN61000-4-5		Level 4, 2KV/L-N, criteria A	
		Conducted	EN61000-4-6		Level 3, criteria A	
		Magnetic Field	EN61000-4-8		Level 4, criteria A	
		Voltage Dips and interruptions	EN61000-4-11		> 95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods	
Others	Packing	390g/pcs; 42.5 x 23 x 16 cm; 10pcs/carton				
	Dimension (LxWxH)	202 x 70.2 x 40 mm				
	Plug and Cable	See page 3~5; Other type available by customer requested				
	MTBF	256.6Khrs min. MIL-HDBK-217F(25 ℃)				
Note	1. Tolerance: includes set up tolerance, line regulation and load regulation. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3.Line regulation is measured from low line to high line at rated load. 4.Load regulation is measured from 0% to 100% rated load. 5. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 ℃ of ambient temperature. 6. De-rating may be needed under low input voltages. Please refer to “Static Characteristic” sections for details. 7. The power supply is considered as a component that will be operated in combination with final equipment.Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.					

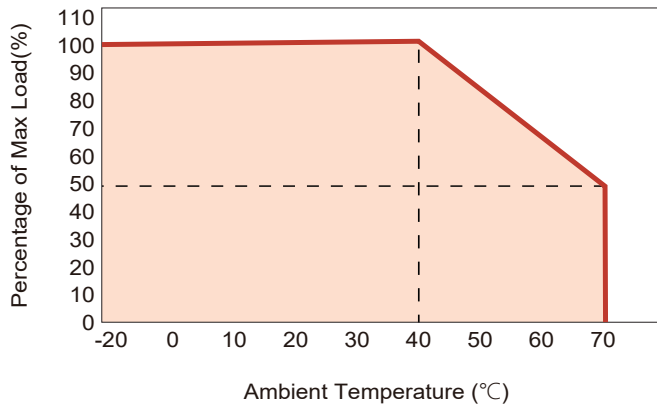
File last modification time: 2025-2-25

YSC120 SERIES

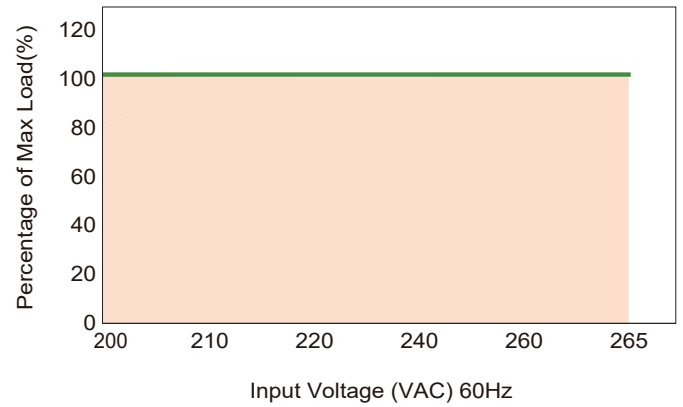
120W

Feature Curves

1. Derating Curve

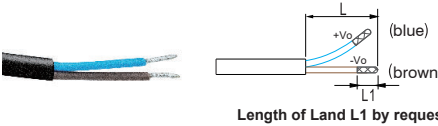


2. Static Characteristics







Input Plug Type

Standard Model : by customer

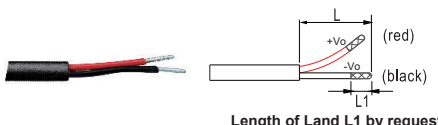
by customer	Pin Assignment
 <p>Length of Land L1 by request</p>	<p>YJ's standard length, L: 30 mm, L1: 5 mm NOTE: The wire color is for reference only, please refer to the actual product</p>

Custom-made Model : EU/US/AU/UK

EU	US	AU	UK
			




DC Output Plug (Option)




Standard Model : by customer




by customer	Pin Assignment
 <p>Length of Land L1 by request</p>	<p>YJ's standard length, L: 30 mm, L1: 5 mm NOTE: The wire color is for reference only, please refer to the actual product</p>




YSC120 SERIES
120W




DC Output Plug (Option)




Tuning Fork Style			
Type No.	A	B	C
	OD	ID	L
D1I	5.5	2.1	9.5
D1J	5.5	2.1	11.0
D1L	5.5	2.5	9.5
D1M	5.5	2.5	11.0

Tuning Fork Style			
Type No.	A	B	C
	OD	ID	L
D1IR	5.5	2.1	9.5
D1JR	5.5	2.1	11.0
D1LR	5.5	2.5	9.5
D1MR	5.5	2.5	11.0

Barrel Style			
Type No.	A	B	C
	OD	ID	L
D2I	5.5	2.1	9.5
D2J	5.5	2.1	11.0
D2L	5.5	2.5	9.5
D2M	5.5	2.5	11.0

Barrel Style			
Type No.	A	B	C
	OD	ID	L
D2IR	5.5	2.1	9.5
D2JR	5.5	2.1	11.0
D2LR	5.5	2.5	9.5
D2MR	5.5	2.5	11.0




Barrel Style			
Type No.	Pin Assignment		
	PIN No.	Output	
M1B	1	-Vo	
	2	-Vo	
	3	+Vo	
	4	-Vo	
	5	+Vo	




Center Pin Style	<div></div>			
Type No.	A	B	C	D
	OD	ID	L	Center Pin
D4A	5.5	3.4	11.0	1.0
D4B	6.5	4.4	11.0	1.4
D4C	7.4	5.1	11.0	0.6




YSC120 SERIES




120W


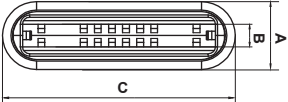

DC Output Plug (Option)

Tuning Fork Style			
		EIAJ equivalent	
Type No.	A	B	C
	OD	ID	L
D3A	2.35	0.7	11.0
D3B	4.0	1.7	11.0
D3C	4.75	1.7	11.0

MIN.Din 3Pin with Lock(male)	   KYCON KPPX-3P equivalent	
Type No.	Pin Assignment	
	PIN No.	Output
M6B	1	+Vo
	2	-Vo
	3	+Vo

MIN.Din 4Pin with Lock(male)			
	KYCON KPPX-4P equivalent		
Type No.	Pin Assignment		
	PIN No.	Output	
M7B	1	+Vo	
	2	-Vo	
	3	-Vo	
	4	+Vo	

MIN.Din 4Pin with Lock(female)				KYCON KPJX-CM-4S equivalent
Type No.	Pin Assignment			
	PIN No.		Output	
M7BF	1		+Vo	
	2		-Vo	
	3		-Vo	
	4		+Vo	

Type-C			
Type No.	A	B	C
	OD	ID	L
C1	2.4	1.3	8.25